

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number
WO 03/057458 A2

(51) International Patent Classification⁷: **B29D 9/00**

(21) International Application Number: **PCT/CA03/00008**

(22) International Filing Date: **8 January 2003 (08.01.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
10/046,019 11 January 2002 (11.01.2002) US
10/321,617 18 December 2002 (18.12.2002) US

(71) Applicant: **DOMCO TARKETT INC. [CA/CA];** 1001
Yamaska Street East, Farnham, Quebec J2N 1J7 (CA).

(72) Inventors: **COURTOY, Jean-François;** 1570 du Mont
Street, St-Bruno de Montarville, Quebec J3V 4L5 (CA).
MENARD, René; 208 William Street, Cowansville, Que-
bec J2K 1L2 (CA). **CALDAS, Victor;** 117 du Nord Street,

#12, Cowansville, Quebec J2K 2L6 (CA). **CHAREST, Claude;** 1647 Dablon Street, St-Bruno de Montarville, Quebec J3V 4S7 (CA).


(74) Agents: **DUBUC, J. et al.;** Goudreau Gage Dubuc, Stock Exchange Tower, 800 Place Victoria, Suite 3400, P.O. Box 242, Montreal, Quebec H4Z 1E9 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: **SELECTIVELY EMBOSSED SURFACE COVERINGS AND PROCESSES OF MANUFACTURE**

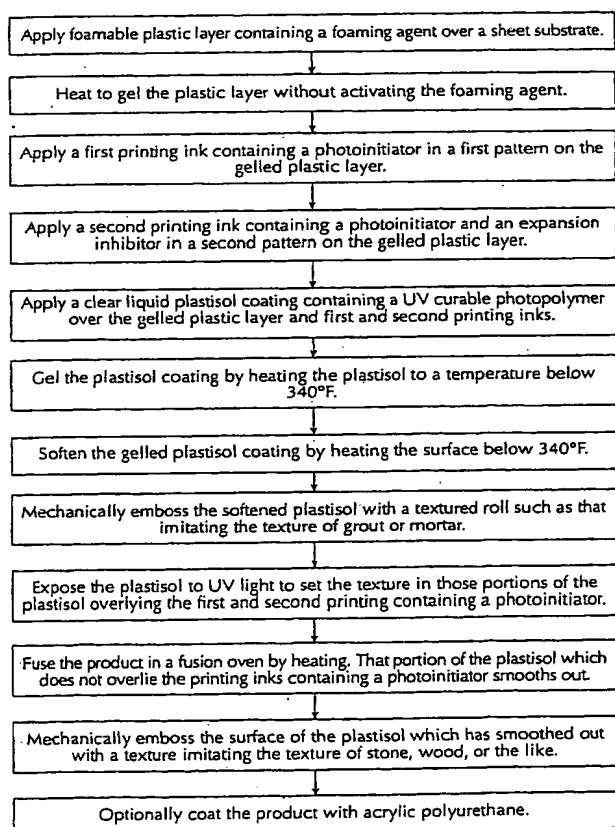

(57) Abstract: Selectivity embossed surface coverings are prepared by mechanically embossing a wear layer which overlays at least one printing ink containing a photoinitiator which has been printed in a pattern or design. The embossed wear layer is subjected to ultraviolet radiation which causes curing of the wear layer in the surface areas disposed over the printing ink. The product then is fused whereby the mechanical embossing in surface areas which are not disposed over the printing ink relaxes and becomes smooth. In a variant of the invention, a thermoplastic wear layer is employed which can be mechanically embossed in the surface areas which are not disposed over the printing ink with a texture different from the first applied mechanical embossing. In another variant, two different spectral regions of UV curing radiation are used so that a urethane coating can be employed as a top coat with a selectively embossed surface.

WO 03/057458 A2



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

SELECTIVELY EMBOSSED SURFACE COVERINGS
AND PROCESSES OF MANUFACTURE

5

10 BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention has to do with a process for manufacturing mechanically embossed synthetic surface coverings and the products obtained thereby. More particularly, the invention relates to floor coverings which are mechanically embossed and processed to create selectively embossed surface areas, thereby creating products having a more realistic appearance. These appearances include, for example, ceramic tile, stone, brick, sandstone, cork, wood, and in some embodiments textured lines or grout lines there between, as well as combinations thereof such as sandstone and ceramic tile, textured wood and smooth ceramic, cork and wood, and stone or slate in combination with ceramic tile.

Description of the Related Art

25 [0003] Synthetic surface coverings including sheet flooring, wall coverings and tile are employed in residential, commercial and institutional applications where decorative effects, durability and ease of installation and maintenance are important considerations. These surface coverings can be designed to imitate a variety of masonry materials such as ceramic tile, stone and brick or they can be designed with unique combinations of color, particles and other decorative features that are not available in other types of surface coverings. In the current marketplace, consumers are

increasingly demanding synthetic surface coverings with improved textural features such as features which realistically imitate not only the textures of materials such as ceramic tile, stone, brick, sandstone, cork, wood and combinations thereof, but also the texture of the grout or mortar which typically is used by a mason or other craftsman to fill the joints between such materials to secure them in their desired position relative to one another.

[0004] The surface covering industry has employed mechanical embossing, chemical embossing, combinations of mechanical and chemical embossing, screen printing and other techniques for years in order to obtain design effects and textures which meet consumer demands. In U.S. Patent No. RE. 33,599 a process is described for obtaining selective matting on synthetic coverings by depositing on an expandable or nonexpandable support substrate (1) a polymer coating which contains at least one first polymerization initiator onto at least a first selected zone and (2) at least one second coating comprised of a crosslinkable monomer which contains at least one second polymerization initiator onto at least a second selected zone. The second zone may encompass at least a portion of the first zone. The first and second initiators are triggered by distinct "spectral zones". Following pre-gelling, an overall graining operation is carried out over at least a portion of the surface followed by curing the first selected zone and thereby fixing the graining thereon. Then gelling is carried out to cause the graining in the second zone to smooth out. The product has a selectively matted appearance. Another method of making differential gloss products is described in U.S. Patent No. 4,298,646.

[0005] The surface texture effects of the present invention are obtained by creating relatively deep emboss depths as compared with the shallow graining or dusting techniques employed to obtain the matted or differential gloss effects of the patents noted above. More specifically, the present invention is directed to the realistic imitation in surface coverings not only of the surface texture of a variety of masonry materials such as ceramic tile, stone, brick, sandstone, cork, wood and combinations thereof,

but also in some embodiments to the realistic imitation of the surface texture of the grout or mortar in the joints between such materials.

SUMMARY OF THE INVENTION

5 [0006] In accordance with the present invention, a novel process is provided for obtaining selective areas of distinctive appearance, e.g., textured grout lines, on the surface of a synthetic surface covering. In one embodiment, to obtain such a product a foamable plastic layer containing a foaming agent is applied over a sheet substrate. The combination is then
10 heated to gel the plastic layer without activating the foaming agent. A first printing ink containing a photoinitiator is then applied in a first pattern on the gelled plastic layer. A second printing ink containing both an expansion inhibitor and a photoinitiator is then also applied to the gelled plastic layer in a second pattern, whereupon a portion of the inhibitor migrates into the
15 gelled plastic layer. Following the printing steps, a liquid curable coating made from a plastisol or organosol and containing an ultraviolet ("UV") curable photopolymer, e.g. an acrylic monomer or oligomer, is applied over the entire surface of the gelled plastic layer, including the first and second printing inks, whereupon a portion of the photoinitiator in the printing inks
20 migrates into the curable coating. The curable coating is then gelled, with or without a cooling step, followed by surface softening through the use of heat. The softened curable coating is then mechanically embossed overall with a texture, such as that imitating grout, whereupon the product is cured by exposure within an enclosure to UV radiation to set the grout texture in
25 those portions of the curable coating overlying the printing inks, both of which contain a portion of the photoinitiator. Upon exiting the UV enclosure, the product enters a fusion and expansion oven wherein that portion of the curable coating which does not overlie the printing inks containing the photoinitiator smooths out such that the grout imitating
30 texture disappears in those areas. Furthermore, those portions of the gelled plastic layer which do not contain the inhibitor applied with the second printing ink, foam and expand. The surface of the curable coating

which has smoothed out may then optionally be mechanically embossed a second time but now with a texture which imitates the texture of stone, wood or the like as hereto before described. A performance coating like acrylic polyurethane is optionally applied to the surface of the product for additional protection against wear. As will be appreciated by one of ordinary skill in the art, more than two printing inks can be used in the process and product of the invention and each of the inks can optionally contain a photoinitiator and/or an inhibitor. Of course, printing inks which do not contain a photoinitiator or an inhibitor can be employed in combination with inks which do contain a photoinitiator and/or an inhibitor in order to obtain desired decorative effects.

[0007] In another embodiment of the invention, printing inks without inhibitors are printed in a pattern or design directly onto a substrate which does not have a foamable plastic layer. The resultant product has a flat surface with different textures or appearances including, in some instances, a three-dimensional appearance. In this embodiment, should textured grout lines be part of the pattern or design, the textured grout lines will be flush with the top surface of the product, i.e. without relief.

[0008] In still another embodiment of the invention, calendered and/or extruded sheets can be employed in place of the foamable and/or curable coatings as explained in the detailed description below.

[0009] A further embodiment of the invention employs printing inks and wear layers having different photoinitiators which react when exposed to UV radiation having different wavelengths to obtain selectively embossed surface coverings having a urethane surface coating.

[0010] All percentages set forth herein are by weight/weight unless otherwise specified.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a flow diagram of a process of the invention.

[0012] FIG. 2 is a fragmentary sectional view through a product made according to the process illustrated in FIG. 1 prior to applying a

curable coating over the gelled plastic layer. This view and those of FIGS. 3 and 4 are only for illustrative purposes and it is not intended that the thickness of the various layers of components shown are drawn to scale.

[0013] FIG. 3 is a fragmentary sectional view through a product made according to the process illustrated in FIG. 1 at the time of the UV curing step.

[0014] FIG. 4 is a fragmentary sectional view through a product made according to the process illustrated in FIG. 1 after the second mechanical embossing step.

10

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] Referring to FIG. 1, a foamable plastic layer containing a foaming agent is applied over a sheet substrate. The combination is then heated to gel the plastic layer without activating the foaming agent. A first printing ink containing a photoinitiator is then applied in a first pattern or design onto the gelled plastic layer using conventional techniques. A second printing ink containing an expansion inhibitor and a photoinitiator, e.g. an ultraviolet radiation polymerization initiator, is then applied to the gelled plastic layer in a second pattern or design, again using conventional techniques, whereupon the inhibitor present in the second printing ink migrates into the gelled plastic layer beneath the second printing ink. The inhibitor must be chosen so that the rate at which it will migrate from the second printing ink into the gelled plastic layer is compatible with the speed of the overall process of making the surface covering. It will be appreciated that the second ink pattern may advantageously be a joint between two tiles so as to imitate ceramic tiling. However, the present invention is not limited to such a design and may represent any desired design. It will also be appreciated that the terms "first printing ink" and "second printing ink" serve only to differentiate the inks and do not necessarily refer to the order in which they are applied to the gelled plastic layer or directly to the substrate neither does it imply that there are only two printing inks to achieve the desired product pattern in the desired colors.

[0016] A clear liquid curable coating containing a UV crosslinkable acrylic monomer or oligomer and optionally a thermal crosslinking initiator, e.g., a radical generator such as peroxide is next applied over the entire surface of the gelled plastic layer including the first and second printing inks. The photoinitiator residing in the first and second printing inks subsequently migrates into the curable coating which has been applied over the inks. The photoinitiator must be chosen so that the rate at which it will migrate from the printing inks into the curable coating is compatible with the speed of the overall process of making the surface covering. The combination of substrate, plastic layer, first and second printing inks, and liquid curable coating is then heated to gel the curable coating. The surface of the curable coating is then softened by heat whereupon the softened curable coating is mechanically embossed with an overall textured roll using conventional techniques. The textured roll preferably imitates the texture of sand, cementitious grout, mortar, cork, terrazzo or the like as hereto before described. The time and temperature required for the gelling process must be sufficiently low in order not to initiate thermal crosslinking of the curable coating at these temperatures. If a thermal crosslinking initiator is not used, electron beam crosslinking techniques or others as will be described in the examples can be employed as known by those skilled in the art.

[0017] To fix the embossed texture in those areas of the curable coating overlying the first and second printing inks containing the photoinitiator, the curable coating containing the UV curable acrylic monomer or oligomer is crosslinked with ultraviolet radiation within an enclosure. The UV radiation decomposes the photoinitiator so as to form free radicals or ions which are needed for crosslinking the monomer and/or oligomer moiety of the curable coating.

[0018] The product is then placed into a fusion oven where it is heated to about 205EC. The effect is that those portions of the curable coating which do not overlie either the first or second printing ink will fluidize and relax such that the deformation of the curable coating in these

areas attributable to the mechanical embossing by means of the textured roll disappear, i.e. smooth over. Additionally, that portion of the foamable plastic layer which does not underlie the second printing ink containing an inhibitor, foams and expands. Any of the monomer or oligomer left
5 unreacted after leaving the UV enclosure can be cured by the thermal initiator optionally added to the curable coating. It is important to select this thermal initiator so that it begins to efficiently cure the unreacted monomer or oligomer after the later portions smooth over.

[0019] The product may then be subjected to a second
10 mechanical embossing step, again by conventional techniques, wherein another texture such as the natural look of stone, wood or the like, as hereinbefore described, is applied to the surface of the curable coating which has smoothed out. Following this step the product can optionally be coated with a performance coating such as acrylic polyurethane.

15 [0020] An important feature of the process and product of the present invention is that the entire surface of the product may be initially textured in the first mechanical embossing step without necessitating a special patterned texturing roller controlled in register with the design or decoration of the surface covering. This is because the surface areas of
20 the curable coating which are not fixed after the first mechanical embossing step will be softened during the subsequent fusion and expansion treatment and will become smooth because of heat relaxation of plastic memories as taught in U.S. Patent No. 3,887,678.

[0021] A product having the construction illustrated in FIGS. 2 to
25 4 is prepared by the process of FIG. 1. Referring to FIG. 2, a foamable plastic layer 1 containing a foaming agent is applied over a sheet substrate 2. The combination is then heated to gel the plastic layer 1. A first printing ink 3 which contains a photoinitiator and a second printing ink 4 which contains an expansion inhibitor and a photoinitiator are applied in a first
30 and second pattern, respectively, to gelled plastic layer 1. A clear liquid curable coating 5 (see FIG. 3) is applied over the entire surface of gelled plastic layer 1 and the first and second printing inks 3, 4. After heating the

curable coating 5 to gel and soften it, the softened curable coating 5 is mechanically embossed in a first embossing step with a textured roll to create a first texture 6. The textured curable coating is then subjected to ultraviolet radiation 7 and the product fused in an oven to cause that portion of the curable coating 5 which does not overlie the printing inks 3, 4 to smooth out so that the textures attributable to the first mechanical embossing step disappear in those areas (see FIG. 4). Furthermore, those portions of the gelled plastic layer 1 which do not contain the inhibitor applied with the second printing ink 4, foam and expand. The surface areas of the curable coating which have smoothed out are then mechanically embossed in a second embossing step to create a second texture 8. The product may then be optionally coated with a performance coating (not shown).

[0022] In another embodiment of the invention we make use of UV curing radiation from two distinctly different spectral regions. This permits us to achieve selective cross-linking in the wear layer through the use of different photoinitiators. The photoinitiators differ in their UV absorption region. A first photoinitiator, which is used in the printing ink, must have sufficient absorption in the region above 350 nanometers ("nm") and preferably above about 400 nm. The second photoinitiator, which is used in the wear layer formulation, cannot have any absorption in the same region as the first photoinitiator. Accordingly, the second photoinitiator will react in the region below about 350 nm and preferably below about 320 nm.

[0023] Radiation above 350 nm can be obtained by selecting from any of the available bulb types (V-bulb (Gallium doped), D-bulb, H-bulb, etc.). For purposes of efficiency, the bulb that is chosen should be one that has significant emissions in the spectral region >350 nm. The V-bulb is preferred as this bulb's emissions are maximized in the region over 350 nm and minimized in the region below.

[0024] To segregate the emissions in the region above 350 nm from the full bulb emissions, it is necessary to filter the lamp emissions

below 350 nm. A glass plate filter can be used that absorbs radiation below a wavelength of approximately 350 nm and transmits the radiation above that wavelength. It is also necessary to maintain the glass at a low and controlled temperature since it needs to be placed stationary below the
5 UV bulb which generates significant infrared radiation (IR). A preferred method is to make use of dichroic reflectors.

[0025] Each component of the product and each step of the process of the invention will now be described with reference to various preferred and alternative embodiments.

10 The Substrate

[0026] The substrate is a relatively flat, fibrous or non-fibrous, backing sheet material, such as a fibrous, felted or matted, relatively flat sheet of overlapping, intersecting fibers. The substrate can, if desired, comprise felts or papers which are woven or non-woven. It can comprise
15 knitted or otherwise fabricated textile material or fabrics made from cellulose, glass, natural or synthetic organic fibers, or natural or synthetic inorganic fibers, or supported or non-supported webs or sheets made therefrom, or filled or unfilled thermoplastic or thermoset polymeric materials. It can also comprise a compact layer. These and other
20 substrate base materials are well known in the art and need not be further detailed here.

The Foamable Plastic Layer

[0027] The foamable plastic layer, when used, can be comprised of any suitable material known in the art for producing foamed plastic layers
25 on a substrate, but is typically a polyvinylchloride ("PVC") plastisol, an organosol, a polyolefin, an ionomer, plasticized PVC or thermoplastic rubber. This layer can be pigmented or free of pigmentation. If the layer is pigmented, a color is preferably selected which is the average of the colors of the end product so that the appearance and aesthetics of the product are
30 maintained during its working life. To one skilled in the art, the average

color means the color perceived when one looks at a surface from a distance of more than about five feet.

[0028] The foamable plastic layer may include any of the various PVC resin materials normally used in connection with coating of decorative sheet materials and may specifically include, but are not limited to, those described in U.S. Patent No. 3,458,337. While a suitable foaming agent or blowing agent as taught by the above-mentioned patent may be used, a blend of azodicarbonamide ("ABFA") and p,p'-oxybis (benzene sulfonyl hydrazide) ("OBSh") foaming agents can be used instead. Additional conventional ingredients such as stabilizers, foaming or blowing agent catalysts, etc. can be used, of course the catalyst is required if chemical inhibition is required. Although the preferred foamable plastic layer is a PVC homopolymer resin, other vinyl chloride resins can be employed. Other synthetic resins are suitable such as polystyrene, substituted polystyrene (preferably wherein the substituents are selected from the group consisting of alkyl having 1-10 carbons, preferably 1-4 carbons, and aryl having 6-14 carbons), polyolefins such as polyethylene and polypropylene, acrylates and methacrylates, polyamide, polyesters and any other natural or synthetic resin.

[0029] The composition of the foamable plastic layer must be compatible with the underlying substrate and the printing inks and, when gelled, must provide a smooth and uniform surface for the first and second printing inks. The composition also must be otherwise compatible with the overall product composition and, therefore, within the principles of this invention. As indicated, it is not essential that a plastisol be used as the foamable plastic layer. Organosols and aqueous latexes are also of use, employing as the dispersing or suspending media, organic solvents and water, respectively, rather than plasticizers as in the case of a plastisol.

[0030] The foamable plastic layer is substantially uniformly applied in its liquid state to the underlying substrate by conventional means such as a knife-over roll coater, direct roll coater, rotary screen, draw down bar, reverse roll coater or wire wound bar. The particular means for

applying the foamable plastic layer does not relate to the essence of the invention, and any suitable coating means can be employed.

[0031] The thickness of the foamable, liquid plastic layer as it is applied to the underlying surface is substantially uniform and is in the range
5 from about 2 to about 30 mils, preferably from about 6 to about 16 mils. The layer can be thicker or thinner as may be required by the particular product application.

[0032] Instead of a foamable plastic layer, a plastic layer which does not contain a foaming or blowing agent can be applied to the
10 underlying substrate in the same manner as described above.

Gelling

[0033] After the foamable, liquid, plastic layer containing a foaming agent is applied over the substrate, the combination is heated for a period of time and at a temperature sufficient to gel the plastic layer, but
15 not sufficient to activate or decompose the blowing or foaming agent. This can be done in an oven or on a heated chrome drum. If an oven is used for the gelling step, a residence time in the oven from about 0.5 minutes to about 3.5 minutes at an oven temperature from about 80EC to about 205EC will give good results. If a chrome drum is used, a dwell time on the
20 drum from about 8 seconds to about 30 seconds at a drum temperature of from about 80EC to about 175EC will give good results. The higher temperatures are used with shorter residence or dwell times and lower temperatures with longer times. The layer is then cooled to provide a surface suitable for printing. Cooling is generally accomplished by
25 contacting the surface of the foamable, gelled plastic layer (and sometimes the underside of the substrate) with one or more cooling drums. Ambient or chilled water is circulated through the drums. Cooling may be enhanced with the use of fans or blowers. The same gelling process can be employed if the plastic layer does not contain a foaming or blowing agent
30 as will be apparent to those skilled in the art. Also calendering or extrusion

techniques followed by lamination onto a substrate of a sheet of similar formulations as above can be used to prepare the printable layer.

The Printing Inks

[0034] In the foregoing preferred embodiment, a first printing ink
5 containing a photoinitiator is applied in a first pattern or design onto the gelled plastic layer. Then, a second printing ink containing a photoinitiator and an expansion inhibitor is applied in a second pattern or design onto the gelled plastic layer. Suitable printing inks include those normally used in the manufacture of surface coverings. These include plastisol, solvent-
10 based systems and water-based systems. Of course, other printing inks which do not contain a photoinitiator or an expansion inhibitor can be applied to obtain design objectives. Furthermore, it is not necessary to employ both the first and second printing inks as long as at least one printing ink with a photoinitiator is employed. Either ink can be employed
15 alone or in combination with other printing inks which do not contain a photoinitiator or an expansion inhibitor. If no foamable plastic layer is employed then inks having an expansion inhibitor are not employed.

[0035] The first, second and other printing inks may be pigmented or non-pigmented and may include organic pigments or
20 inorganic pigment particles such as titanium dioxide, iron oxide, carbon black, mica, pearlescent and the like. Decorative reflective particles such as metallics, may also be included as part of one or more printing ink compositions. The types and components of the first, second and other printing inks can be the same or different.

25 [0036] The first and second printing inks contain a photoinitiator. By way of example only, and not by limitation, the following ultraviolet crosslinking initiators may be used in accordance with the present invention: benzophenone, 2-chloro-thioxanthone, 2-methyl-thioxanthone, 2-isopropyl-thioxanthone, benzoin, 4,4'-dimethoxybenzoin, benzoin ethyl
30 ether, benzoin isopropyl ether, benzyldimethylketal, 1,1,1-trichloroacetophenone, 1-phenyl-1,2-propanedione-2-(ethoxycarbonyl)-oxide,

diethoxyacetophenone, and dibenzosuberone. The inks containing the photoinitiators should contain about 1% to about 15%, preferably about 10% by weight of photoinitiator.

5 [0037] The second printing ink also contains an expansion inhibitor. By way of example only, and not by limitation, the following inhibitors may be used in accordance with the present invention: benzotriazole, tolyltriazole, fumaric acid and trimellitic anhydride. The specific expansion inhibitor which is used does not relate to the essence of the present invention and many other suitable and acceptable expansion
10 inhibitors are available to one of ordinary skill in the art.

[0038] Printing of the inks onto the gelled plastic layer can be effected by rotogravure, flexigraphic, screen printing, pad or knurled printing, or other printing techniques conventionally employed in making floor or wall covering products.

15 [0039] When the second printing ink is applied to the gelled plastic layer, the inhibitor present in the second printing ink migrates into the gelled plastic layer beneath the second printing ink.

[0040] It will be appreciated that in the present invention that one ink, two inks or multiple inks may be used to print patterns or designs on
20 the substrate or on the gelled plastic layer. Each ink may optionally contain a photoinitiator and/or an inhibitor. Of course ink without photoinitiators or inhibitors can be used to obtain design objectives. It will also be appreciated that the order of printing is not critical and is not to be construed as a limitation of the invention. Furthermore, it is to be
25 understood that the print areas of the inks may overlap.

[0041] When UV curing radiation from two different spectral regions is to be used, the printing ink (with or without a foam inhibitor) is formulated with a photoinitiator that absorbs UV radiation in the spectral region above 350 nm. Suitable photoinitiators are commercially available
30 and they include, but are not limited to, the following:

IRGACURE 784

IRGACURE 819

IRGACURE 1700

IRGACURE 1800

IRGACURE 1850

DAROCUR 4265

5 [0042] In experimental work, photoinitiators were employed at a concentration of 20% in the printing ink, but higher or lower concentrations can be employed to obtain effective results as will be apparent to those having skill in the art as it is well known to apply by printing a defined quantity of reagent onto a surface through the use of a defined gravure
10 printing an ink containing a defined concentration of the reagent. Effective results are attained when a sufficient quantity of photoinitiator is applied with the printing ink to cause the photoinitiator to migrate into the curable coating and have a result effective effect. The range of concentrations that will be sufficient is based in part on the number of lines per inch etched into
15 the print cylinder. The range of lines per inch is generally from about 80 – 220 and preferably from about 90 – 130. The range of sufficient concentrations of photoinitiators in the printing ink is generally from about 5% to about 30% but smaller amounts may be effective and larger amounts may be used depending upon the particular application.

20 The Curable Coating

 [0043] After the printing inks have been applied to the gelled plastic layer, a liquid curable coating containing a crosslinkable photopolymer or monomer, such as an acrylic monomer or oligomer, and optionally a thermal crosslinking initiator, is applied over the entire surface
25 of the gelled plastic layer including over the first and second printing inks. In the preferred embodiment, the photoinitiators residing in the first and second printing inks then migrate into that portion of the curable layer which was applied over the first and second printing inks. The curable layer may comprise a plastisol and, as used herein, the term "plastisol" is
30 generally intended to cover a relatively high molecular weight polyvinylchloride ("PVC") resin dispersed in one or more plasticizers. A

plastisol upon heating or fusing forms a tough plasticized solid. For purposes of this specification, plastisol compositions are also intended to include organosols. A clear calendered or extruded film of the same composition can also be used. It is adhered onto the printed gelled plastic layer by means known in the art, for example, laminating.

[0044] The thickness of the curable coating as it is applied in its liquid, tacky, ungelled state to the gelled plastic layer and inks is substantially uniform and is in the range from about 2 mils to about 40 mils, preferably from about 8 mils to about 20 mils. The coating can be thinner or thicker as may be required by the particular product application. The curable coating is applied by conventional means such as described above with respect to application of the foamable plastic layer. The particular means for applying the curable coating does not relate to the essence of the invention and any suitable coating means can be employed.

[0045] The curable coating is preferably a clear (transparent) layer but it can be slightly tinted as long as it remains translucent and allows UV penetration. The curable coating may also contain solid particulates such as chips, flakes, flitters, etc.

[0046] By way of example only, cross-linkable monomers suitable for use in connection with the present invention include, but are not limited to, the following compounds: ethylene glycol dimethacrylate, ethylene glycol diacrylate, diethylene glycol dimethacrylate, diethylene glycol diacrylate, triethylene glycol dimethacrylate, triethylene glycol diacrylate, tetraethylene glycol dimethacrylate, tetraethylene glycol diacrylate, polyethylene glycol dimethacrylate, polyethylene glycol diacrylate, 1,3-butylene glycol dimethacrylate, 1,4-butylene glycol dimethacrylate, 1,3-butylene glycol diacrylate, 1,4-butylene glycol diacrylate, 1,6-hexanediol dimethacrylate, 1,6-hexanediol diacrylate, neopentyl glycol dimethacrylate, neopentyl glycol diacrylate, (ethoxylated) bis-phenol A dimethacrylate, divinylbenzene, divinyltoluene, trimethylolpropane trimethacrylate, trimethylolpropane triacrylate, pentaerythritol triacrylate, glyceryl trimethacrylate, pentaerythritol tetracrylate and pentaerythritol tetramethacrylate.

[0047] The curable coating containing a crosslinkable reagent, monomer and/or oligomer should contain 2 to 40%, preferably about 10% by weight of monomer.

[0048] By way of example only, cross-linkable oligomers suitable for use in connection with the present invention include, but are not limited to the oligomers described in U.S. Patent No. 6,146,711.

Top Coat Wear Layer

[0049] This layer is usually used in the embodiment which employs UV curing radiation from two different spectral regions, but it can be used in other embodiments as will be apparent from the examples below. When the formulation is used in the embodiment which employs two different UV spectral regions, it includes a photoinitiator that does not have any appreciable absorption in the spectral region above 350 nm. Suitable photoinitiators are commercially available and they include, but are not limited to, IRGACURE 184 and IRGACURE 2959. A water-based UV curable urethane is employed. It is applied to the surface of the gelled curable coating (also referred to as a base wear layer in this embodiment) and dried to form a film that can be mechanically embossed. Examples of suitable coatings include Stahl TRL 101 and Stahl TRL 248.

Heating and First Embossing Step

[0050] To prepare the curable coating for mechanical embossing, the curable coating is gelled by heating. The product is passed through an oven maintained at a temperature from about 70EC to about 170EC, preferably from about 135EC to about 160EC, for a residence time from about 0.75 to 3 minutes. A hot air recirculating oven and/or an infrared ("IR") oven operated at these temperatures is generally employed. The product surface is then softened by heat, preferably by means of an IR oven, to a temperature from about 150EC to 170EC, preferably about 160EC, as measured by a pyrometer, before the embossing rollers nip.

[0051] It is understood throughout the specification, including the examples and the claims of the present application that the step of mechanical embossing always includes some form of heating to soften the surface before subjecting it to the embossing rollers to attain the desired mechanically embossed texture. Mechanical embossing is applied to previously gelled smooth and solidified material which is subsequently surface heated before it is subjected to the embossing rollers.

[0052] Once the curable coating has been adequately softened, it is mechanically embossed by means of a textured roll which imitates the texture of sand, cementitious grout, mortar or the like as hereinbefore described. The textured roll operates under a pressure that depends upon the degree of texturing desired as is known by a person having ordinary skill in the art.

Ultraviolet ("UV") Curing

[0053] The product may be cooled before it is UV cured. It is not a requirement but it reduces the fumes in the UV enclosure which would reduce the UV transference to the product. Once the first embossing step has been completed, the product enters an enclosure where it is subjected to the emissions of a UV lamp to cross-link that portion of the curable coating overlying the first and second printing inks containing a photoinitiator. This step fixes the embossed texture into the surface areas of the plastisol disposed over the ink containing the photoinitiator.

[0054] The UV curing step can occur in a UV reactor wherein the product is subjected to about 100 to about 1500 milliJoules per square centimeter (mJ/sq. cm.), preferably about 1000 mJ/sq. cm., of focused or diffused UV radiation, preferably focused radiation, at about 100 to about 400 watts per inch of adjustable power using H-type, V-type, or D-type bulbs, preferably H-type bulbs. Such a UV reactor is available from IST (Germany).

[0055] As described above, some embodiments of the invention employ UV radiation from two different spectral regions. Examples of these embodiments are provided in detail below.

Fusion and Expansion

5 [0056] After portions of the curable coating have been cured in the above-described enclosure, the product obtained therefrom is introduced to a fusion oven maintained at a temperature from about 175EC to about 220EC, preferably about 205EC. The product has a residence
10 time in the oven from about 1 to about 3 minutes. A hot air recirculating oven and/or an IR oven operated at these temperatures is generally employed.

[0057] Subjecting the product to these temperatures for this period of time fuses the substrate, the plastic layer, the printing inks and the curable coating together and foams and expands those portions of the
15 foamable plastic layer which do not underlie the second printing ink which contains an inhibitor. Furthermore, those portions (i.e., surface areas) of the curable coating which were not previously cured, i.e., do not overlie either the first or second printing inks, will relax such that the deformation and texturing in the still curable coating in these areas attributable to the
20 first mechanical embossing step to this portion disappear, i.e. smooth over. More particularly, during this step that portion of the curable coating which has not been cured (crosslinked) during UV exposure undergoes relaxation which has the effect of smoothing the textured surface, while that portion of the curable coating that has been cured during UV curing retains its
25 textured appearance. This relaxation phenomenon is one that requires the first overall embossing to be conducted at a temperature as low as possible to minimize the plastic component of the mechanical deformation induced in the curable coating by the embossing roll.

Second Embossing Step (Optional)

30 [0058] After being removed from the fusion oven, those portions of the curable coating (now the cured coating) which do not overlie the

printing inks and hence have smoothed out, are mechanically embossed a second time by means, known to those of ordinary skill in the art, such as a texture roll, or other conventional means containing textures such as the natural looking texture of stone, wood or the like as hereto before
5 described.

Performance Coating

[0059] After fusion and expansion or after the optional second mechanical embossing step is completed, the product is cooled to from about 15EC to about 80EC by conventional means such as air or water
10 cooled drums. Then a performance coating such as acrylic polyurethane can optionally be applied to the product by such conventional means as print cylinders, roller coaters and the like.

[0060] The following non-limiting examples provide particular and preferred embodiments of the process and product of the present invention.

15 Use of Calendered or Extruded Layers

[0061] As noted above, calendered or extruded sheets can be employed as layers in place of any one or both of the foamable layer and/or curable layer. When a foamable sheet is employed it is formed by calendering or an extrusion die at a temperature below the decomposition
20 temperature of the foaming or blowing agent, or the catalyzed foaming or blowing agent. When a sheet is used in place of the curable layer, it is processed by calendering or an extrusion die under conditions which do not significantly decompose the peroxide, so that it remains a curable layer. When sheet materials are used they are laminated to the underlying
25 surface of the product by employing techniques known by those having ordinary skill in the art.

EXAMPLE 1

[0062] A ceramic pattern having grout lines was printed on a
30 foamable base. In the grout lines of the pattern the ink printed therein contained an inhibitor and a photoinitiator (P1). A 0.010 inch thick coating

was applied of a clear plastisol (A1) containing a curable acrylic monomer and another radical generator (peroxide) to heat set the free monomer left unreacted when the product left the UV reactor.

[0063] The plastisol (A1) was heated to a temperature of 150EC to gel. Following gelling the surface was heated with IR to 160EF to soften the surface for mechanical embossing. Then the entire surface of the product was mechanically embossed with a sandy textured roll (E1).

[0064] To fix the embossed texture in the plastisol wear layer area overlaying the ink (P1), the gelled surface of the product was subjected to UV radiation at an irradiation of 1000mJ/sq. cm., H type bulb, to crosslink the monomer.

[0065] To create a relief, the product was conveyed into a fusion oven where it was heated to 205EC for 2 minutes to blow the foamable layer and create depressions in the areas printed with P1 ink. The areas of the embossed and crosslinked plastisol wear layer disposed over the printed grouts kept the texture as fixed by the UV processing and the remainder of the surface was smoothed out by relaxation.

[0066] This process made a grout appearance imitating the three-dimensional texture of a real cementitious grout. Furthermore, as a printing technique was used to locate the texture, the product was consequently embossed in register.

[0067] After the product was fused, another texture was applied by mechanical embossing of the raised portions of the product. Optionally, the product then can be coated with a polyurethane which can be cured by heat or by UV radiation. To apply this coating in a thin layer, the use of an air knife will maintain the initial texture of the uncoated product. The product is then cooled and rolled.

[0068] In this example the ink formulation (P1) was as follows:

<u>Ingredients</u>	<u>Quantity (parts by weight)</u>
Clear vehicle	82

21

Inhibitor (tolyltriazole)	10
Photoinitiator (IRGACURE 2959)	8
Color	Following the pattern

[0069] The wear layer formulation (A1) was as follows:

<u>Ingredients</u>	<u>Quantity (parts by weight)</u>
SANTICIZER 377	400
TXIB	45
SARTOMER SR-350	110
DICUP (10% solution in SANTICIZER 377)	21
Heat stabilizer	98
Extender PVC	136
Paste PVC (75Kv)	930

5

EXAMPLE 2

[0070] A ceramic/slate pattern having grout lines was printed on a foamable base. In the grout lines of this pattern the ink contained an inhibitor and in the slate area a full tone was printed with an ink containing a photoinitiator (P2). A 0.014 inch thick coating of a clear plastisol (A2) was applied containing a curable acrylic monomer and another radical generator (peroxide) to heat set the free monomer left unreacted when the product leaves the UV reactor. Then the process of Example 1 was followed but using an embossing roll (E2) that had a slate texture instead of the sandy texture (E1). After the product was fused and blown, it was cooled and rolled. The slate texture was only disposed over the areas of the product having the slate print. This gave a better rendering of the original assembly of slate and ceramic.

[0071] In this example the wear layer formulation (A2) was as follows:

20

<u>Ingredients</u>	<u>Quantity (parts by weight)</u>
SANTICIZER 377	400
TXIB	45
SARTOMER SR-350	220
DICUP (10% solution in SANTICIZER 377)	21
Heat Stabilizer	98
Extender PVC	136
Paste PVC (70Kv)	930

EXAMPLE 3

[0072] An old ceramic look pattern was printed on a foamable base. In the grout parts of this pattern the ink contained an inhibitor and a photoinitiator (P1) and in some fields of the ceramic the ink contained a photoinitiator (P2). A 0.020 inch thick coating of a clear plastisol (A3) was applied containing a curable acrylic monomer and another radical generator (peroxide) to heat set the free monomer left unreacted when the product left the UV reactor. Then the process of Example 1 was followed using the sandy texture (E1). After the product was fused and blown, the product was cooled and rolled. The appearance of the product was like an old ceramic floor with worn surfaces by spots with a three-dimensional cementitious grout.

[0073] In this example the wear layer formulation (A3) was as follows:

<u>Ingredients</u>	<u>Quantity (parts by weight)</u>
SANTICIZER 377	400
TXIB	45
SARTOMER SR-350	220
DICUP (10% solution in SANTICIZER 377)	21
Heat Stabilizer	98

<u>Ingredients</u>	<u>Quantity (parts by weight)</u>
Extender PVC	136
Paste PVC	930

EXAMPLE 4

[0074] On a flat compact base a wood pattern was printed comprising planks with ticking and joint lines. In the joint lines and in the
5 ticking parts of this pattern the ink contained a photoinitiator (P2). A 0.004 inch thick coating was applied of a clear plastisol (A4) containing a curable acrylic monomer and oligomer and another radical generator (peroxide) to heat set the free monomer and oligomer left unreacted when the product left the UV reactor. Then the process of Example 1 was followed but using
10 an embossing roll (E3) that had a flat, dull texture instead of the sandy texture (E1). After the product was fused, the product was cooled and rolled. The product had the appearance of a more realistic wood parquet when compared with a laminated wood parquet.

[0075] In this example the wear layer formulation (A4) is as
15 follows:

<u>Ingredients</u>	<u>Quantity (parts by weight)</u>
STAHL U26253	75
SARTOMER SR-209	550
DICUP (10% solution in SARTOMER SR-209)	20
Heat Stabilizer	60
Paste PVC (75Kv)	1000

EXAMPLE 5

[0076] A foamable plastic layer containing a foaming agent was
20 applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a photoinitiator (a light activated crosslinking initiator) which

reacts when exposed to UV radiation, was then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol, and optionally containing a UV curable photopolymer, was applied over the entire surface of the gelled plastic layer, including the printing ink, whereupon a portion of the photoinitiator in the printing ink migrated into the base wear layer above the printing ink. The product was then heated to gel the base wear layer, again without activating the foaming agent in the foamable plastic layer. After this gelling step, a top coat wear layer made of a UV curable, waterborne polyurethane free of photoinitiator was applied over the entire surface of the gelled base wear layer whereupon a portion of the photoinitiator in the base wear layer migrates into the top coat wear layer. The top coat wear layer was subsequently dried by forced heated air to drive off the water carrier, leaving a polyurethane coating film across the surface of the gelled base wear layer of PVC plastisol.

[0077] The composite wear layer, comprising the PVC plastisol base wear layer plus the polyurethane coating film, was then heated to soften the base wear layer and then mechanically embossed overall with a first mechanical embossing texture, such as that of sand. Thereafter the product was cured by exposure, within an enclosure, to UV radiation to cure and set the texture in those portions of the PVC plastisol base wear layer which contain the UV curable photopolymer, and the polyurethane coating film containing the photoinitiator (i.e., those portions of the base wear layer (optionally containing the photopolymer) and polyurethane coating film overlying or on top of the printing ink containing the photoinitiator). Upon exiting the UV enclosure, the product entered a fusion and expansion oven whereupon the product was fused, the foamable plastic layer was blown (foamed), and that portion of the composite wear layer not containing the photoinitiator (i.e., those portions of the composite wear layer not overlying or on top of the printing ink containing the photoinitiator) smooths out such that the texture imparted by the first mechanical embossing step disappeared in those areas. The composite

wear layer comprising the fused PVC plastisol base wear layer and the polyurethane coating film is then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitates the natural texture of stone, ceramic, wood or the like. Thereafter, the polyurethane coating film of the product was coated with a solution of alcohol and a photoinitiator which reacts when exposed to UV radiation. The product was then dried in an oven with forced air to evaporate the alcohol. The product was then again cured by exposure, within an enclosure, to UV radiation to crosslink the polyurethane coating film and the base wear layer if the base wear layer contains the UV curable photopolymer.

EXAMPLE 6

[0078] A foamable plastic layer containing a foaming agent was applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a first photoinitiator which reacts when exposed to UV radiation having a wavelength above 400 nm was then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol and optionally containing a UV curable photopolymer was applied over the entire surface of the gelled plastic layer, including the printing ink, whereupon a portion of the photoinitiator in the printing ink migrated into the base wear layer above the printing ink. The product was then heated to gel the base wear layer, again without activating the foaming agent in the foamable plastic layer. After this gelling step, a top coat wear layer made of a UV curable, waterborne polyurethane containing a second photoinitiator which reacts when exposed to UV radiation having a wavelength below 350 nm, e.g., Irgacure IR 184, was applied over the entire surface of the gelled base wear layer whereupon a portion of the first photoinitiator in the base wear layer migrates into the top coat wear layer. The top coat wear layer was subsequently dried by forced heated air to

drive off the water carrier, leaving a polyurethane coating film containing a first and a second photoinitiator across the surface of the gelled curable coating base wear layer of PVC plastisol.

[0079] The composite wear layer, comprising the PVC plastisol
5 base wear layer plus the polyurethane coating film was then heated to soften the base wear layer and then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product was cured by exposure, within an enclosure, to UV radiation having only wavelengths above 400 nm to cure and set the texture in those
10 portions of the PVC plastisol base wear layer which contain the UV curable photopolymer, and the polyurethane coating film containing the first photoinitiator (i.e, those portions of the base wear layer (optionally containing the photopolymer) and polyurethane coating film overlying or on top of the printing ink containing the first photoinitiator). Upon exiting the
15 UV enclosure, the product entered a fusion and expansion oven whereupon the product was fused, the foamable plastic layer was blown (foamed), and that portion of the composite wear layer which did not contain the first photoinitiator smoothed out such that the texture imparted by the first mechanical embossing step disappeared in those areas. The
20 composite wear layer comprising the fused PVC plastisol base wear layer and the polyurethane coating film was then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitates the natural texture of stone, ceramic, wood or the like. Thereafter the product was again cured by exposure, within an enclosure,
25 to UV radiation to cross-link the yet uncured polyurethane coating film by reacting with the second photoinitiator, and the base wear layer if the base wear layer contains the UV curable photopolymer.

EXAMPLE 7

30 [0080] A foamable plastic layer containing a foaming agent is applied over a sheet substrate. The combination is then heated to gel the plastic layer without activating the foaming agent. A printing ink containing

a first photoinitiator which reacts when exposed to UV radiation having a wavelength of about 400 nm is then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol, and optionally
5 containing a UV curable photopolymer, is applied over the entire surface of the gelled plastic layer, including the printing ink, whereupon a portion of the photoinitiator in the printing ink migrates into the base wear layer above the printing ink. The product is then heated to gel the base wear layer, again without activating the foaming agent in the foamable plastic layer.
10 After this gelling step, a top coat wear layer made of a UV curable, 100 percent reactive polyurethane containing a second photoinitiator which reacts when exposed to UV radiation having a wavelength below 350 nm, is applied over the entire surface of the gelled base wear layer whereupon a portion of the photoinitiator in the base wear layer migrates into the top
15 coat wear layer. The top coat wear layer is subsequently dried under nitrogen blanketing with the minimum energy necessary to solidify to dry touch state the polyurethane coating now containing the first and second photoinitiator. If too much curing energy is given, i.e. the coating is too highly cured, the PU coating will wrinkle under the next step of submitting
20 the product to the IR preceding the mechanical embossing with a texture like sand. The same will then also happen in the fusion oven used for the expansion of the foamable layer.

[0081] The composite wear layer, comprising the PVC plastisol base wear layer containing the first photoinitiator plus the polyurethane
25 coating containing the first and the second photoinitiator, is then heated to soften the base wear layer and then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product is cured by exposure, within an enclosure, to UV radiation having only wavelengths above 400 nm to cure and set the texture in those
30 portions of the PVC plastisol base wear layer, which contain the UV curable photopolymer, and the polyurethane coating overlying the printing ink and containing the first photoinitiator. Upon exiting the UV enclosure, the

product enters a fusion and expansion oven whereupon the product is fused, the foamable plastic layer is blown (foamed), and that portion of the composite wear layer which does not contain the first photoinitiator smooths out such that the texture imparted by the first mechanical
5 embossing step disappears in those areas. The composite wear layer comprising the fused PVC plastisol base wear layer and the polyurethane coating is then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitates the natural texture of stone, ceramic, wood or the like. Thereafter the product is again cured by
10 exposure, within an enclosure, to UV radiation to crosslink the polyurethane coating film which did not react upon exposure to the UV radiation having wavelengths above 400 nm, and the base wear layer if the base wear layer contains the UV curable photopolymer.

15

EXAMPLE 8

[0082] A foamable plastic layer containing a foaming agent was applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a photoinitiator which reacts when exposed to UV radiation was
20 then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol and optionally containing a UV curable photopolymer was applied over the entire surface of the gelled plastic layer, including the printing ink, whereupon a portion of the photoinitiator in the printing ink
25 migrated into the base wear layer above the printing ink. The product was then heated to gel the base wear layer, again without activating the foaming agent in the foamable plastic layer. After this gelling step, a top coat wear layer made of a UV curable, waterborne polyurethane was applied over the entire surface of the gelled base wear layer whereupon a
30 portion of the photoinitiator in the base wear layer migrated into the top coat wear layer. The top coat wear layer was subsequently dried by forced

heated air to drive off the water carrier, leaving a polyurethane coating film across the surface of the gelled base wear layer of PVC plastisol.

[0083] The composite wear layer, comprising the PVC plastisol base wear layer plus the polyurethane coating film was then heated to soften the base wear layer and then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product was cured by exposure, within an enclosure, to UV radiation to cure and set the texture in those portions of the PVC plastisol base wear layer which contained the UV curable photopolymer, and the polyurethane coating film containing the photoinitiator (i.e., those portions of the base wear layer (containing the photopolymer) and polyurethane top coat overlying or on top of the printing ink). Upon exiting the UV enclosure, the product entered a fusion and expansion oven whereupon the product was fused, the foamable plastic layer was blown (foamed), and that portion of the composite wear layer not containing the photoinitiator (i.e., those portions of the composite wear layer not overlying or on top of the printing ink) smoothed out such that the texture imparted by the first mechanical embossing step disappeared in those areas. The composite wear layer comprising the fused PVC plastisol base wear layer and the polyurethane coating film was then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitates the natural texture of stone, ceramic, wood or the like. Thereafter, the uncured portions of the composite wear layer were cured by exposing the product to an electron beam curing unit rated at 200KV with an energy dose of 3 mega rads to crosslink the polyurethane coating film and the base wear layer if the base wear layer contains the UV curable photopolymer.

EXAMPLE 9

[0084] A foamable plastic layer containing a foaming agent was applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a photoinitiator synergist was then applied in a pattern on the

gelled plastic layer. A photoinitiator synergist is a product that in combination with a photoinitiator will increase the conversion rate of the photopolymer. e.g., ITX or EDB synergists in combination with Esacure 1001 (from Lombardi). Following the printing step, a liquid curable coating wear layer made from a clear PVC plastisol or organosol and containing a photoinitiator, sensitive to the photoinitiator synergist, which both react to UV radiation and also containing a UV curable photopolymer, was applied over the entire surface of the gelled plastic layer, including the printing ink, whereupon a portion of the photoinitiator synergist in the printing ink migrated into the wear layer above the printing ink. The product was then heated to gel the wear layer without activating the foaming agent in the foamable plastic layer.

[0085] After this gelling step, the wear layer was heated to soften it and then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product was cured by exposure, within an enclosure, to UV radiation under such energy to only cure and set the texture in those portions of the PVC plastisol wear layer, overlying the printing inks containing the photoinitiator synergist. Upon exiting the UV enclosure, the product entered a fusion and expansion oven whereupon the product was fused, the foamable plastic layer was blown (foamed), and that portion of the wear layer which does not overlie the printing inks containing the photoinitiator synergist smoothed out such that the texture imparted by the first mechanical embossing step disappeared in those areas. This smoothing out defines the maximum energy that the product receives in the first UV reactor. The fused PVC coating wear layer was then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitated the natural texture of stone, ceramic, wood or the like. Thereafter, the product was again cured by exposure, within an enclosure, to UV radiation to cure the uncured portions of the PVC wear layer.

EXAMPLE 10

[0086] A foamable plastic layer containing a foaming agent was applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a photoinitiator synergist was then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol and optionally containing a photoinitiator sensitive to the photoinitiator synergist which reacts to UV radiation and further containing a UV curable photopolymer was applied over the entire surface of the gelled plastic layer, including the printing ink, whereupon a portion of the photoinitiator synergist in the printing ink migrates into the base wear layer above the printing ink. The product was then heated to gel the base wear layer without activating the foaming agent in the foamable plastic layer. After this gelling step, a top coat wear layer made of a UV curable, waterborne polyurethane containing additional photoinitiator of the same type was applied over the entire surface of the gelled base wear layer whereupon a portion of the photoinitiator synergist in the base wear layer migrated into the top coat wear layer. The top coat wear layer was subsequently dried by forced heated air to drive off the water carrier, leaving a polyurethane coating film across the surface of the gelled base wear layer of PVC plastisol.

[0087] The composite wear layer, comprising the PVC plastisol base wear layer plus the polyurethane coating film, was then heated to soften the base wear layer and then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product was cured by exposure, within an enclosure, to UV radiation to cure and under such energy to only set the texture in those portions of the PVC plastisol base wear layer which contain the UV curable photopolymer, and the polyurethane coating film overlying or on top of the printing ink containing the photoinitiator synergist. Upon exiting the UV enclosure, the product entered a fusion and expansion oven whereupon the product was

fused, the foamable plastic layer was blown (foamed), and that portion of the composite wear layer not overlying or on top of the printing ink containing the photoinitiator synergist smooths out such that the texture imparted by the first mechanical embossing step disappeared in those areas. The composite wear layer comprising the fused PVC plastisol base wear layer and the polyurethane coating film was then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitated the natural texture of stone, ceramic, wood or the like. Thereafter, the product was again cured by exposure, within an enclosure, to UV radiation to crosslink overall the polyurethane coating film and the base wear layer if the base wear layer contains the UV curable photopolymer.

EXAMPLE 11

[0088] A foamable plastic layer containing a foaming agent was applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a photoinitiator which reacts when exposed to UV radiation at wavelengths greater than 400 nm was then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol, was applied at a thickness of 15 mils. This base layer does not contain any UV curable photopolymer. The product was then heated to gel the base wear layer, without activating the foaming agent in the foamable plastic layer. Following this gelling step, a top coat wear layer made of a UV curable coating, e.g., waterborne polyurethane, polycarbonate, epoxy-acrylate, epoxy-methacrylate, polyester-acrylate, polyether-acrylate, (All described in UCB, Sartomer or Stahl product brochures) PVC-acrylate curable coating, containing a photoinitiator which reacts when exposed to UV radiation having a wavelength below 350 nm was applied over the entire surface of the gelled base wear layer. The top coat wear layer was subsequently

solidified by forced heated air to either drive off the water carrier or to gel it, leaving a coating film across the surface of the gelled base wear layer.

[0089] The composite wear layer, comprising the base wear layer plus the UV curable polyurethane coating film, was then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product was cured by exposure, within an enclosure, to UV radiation having wavelengths only above 400 nm to cure and set the texture in those portions of the top wear layer overlaying the print area with the first photoinitiator. The first photo initiator reacting above 400nm migrates into the top wear layer where it cures the acrylate moieties.

[0090] Upon exiting the UV enclosure the product entered a fusion and expansion oven whereupon the product was fused, the foamable plastic layer was blown (foamed), and that portion of the composite wear layer which did not contain the first photoinitiator smoothed out such that the texture imparted by the first mechanical embossing step disappeared in those areas. The composite wearlayer comprising the fused base wear layer and the polyurethane coating film was then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitates the natural texture of stone, ceramic, wood or the like. Thereafter, the product was again cured by exposure, within an enclosure, to UV radiation to crosslink the yet uncured polyurethane coating film by reacting with the second photoinitiator.

25

EXAMPLE 12

[0091] A foamable plastic layer containing a foaming agent was applied over a sheet substrate. The combination was then heated to gel the plastic layer without activating the foaming agent. A printing ink containing a photoinitiator which reacts when exposed to UV radiation was then applied in a pattern on the gelled plastic layer. Following the printing step, a liquid curable coating base wear layer made from a clear PVC plastisol or organosol, was applied at a thickness of 15 mils. This base

30

layer did not contain any UV curable photopolymer. The product was then heated to gel the base wear layer, without activating the foaming agent in the foamable plastic layer. Following this gelling step, a top coat wear layer made of a UV curable coating e.g. waterborne polyurethane, polycarbonate, epoxy-acrylate, epoxy-metacrylate, polyester-acrylate, polyether-acrylate, (All described in UCB, Sartomer or Stahl product brochures) PVC-acrylate curable coating, containing a photoinitiator which reacts when exposed to UV radiation was applied over the entire surface of the gelled base wear layer. The top coat wear layer was subsequently solidified by forced heated air either to drive off the water carrier or to gel it, leaving a coating film across the surface of the gelled base wear layer.

[0092] The composite wear layer, comprising the base wear layer plus the UV curable coating film, was then mechanically embossed overall with a first mechanical embossing texture, such as that of sand, whereupon the product was cured by exposure, within an enclosure, to UV radiation under such energy to only cure and set the texture in those portions of the top wear layer overlying the printing inks containing the photoinitiator. (This was an unexpected result as we got a kind of amplifying curing effect on the top wear layer in the area where the photoinitiator had migrated from the ink into this top wear layer. It cured under much less energy than that determined if adding both photoinitiator quantities in the top wear layer, i.e., from the migration from the printing ink plus the photoinitiator included in this top wear layer formulation.)

[0093] Upon exiting the UV enclosure the product entered a fusion and expansion oven whereupon the product was fused, the foamable plastic layer was blown (foamed), and that portion of the composite wear layer which did not contain the first photoinitiator smoothed out such that the texture imparted by the first mechanical embossing step disappeared in those areas. The composite wearlayer comprising the fused base wear layer and the curable coating film was then optionally mechanically embossed by a second mechanical embossing step, but now with a texture which imitates the natural texture of stone, ceramic, wood or

the like. Thereafter, the product was again cured by exposure, within an enclosure, to UV radiation to crosslink the yet uncured polyurethane coating film by reacting with the second photoinitiator.

[0094] In the foregoing Examples, the product of the invention
5 also can be made by replacing the base wear layers or other layer directly under and adjacent to the polyurethane top coating with a thermoplastic layer such as the type made from polyolefins, replacing the PVC layers containing a crosslinkable photopolymer and the polyurethanes with any radiation crosslinkable clear polymer that can be used as a top wear layer.
10 Of course, the top wear layer can be applied directly to the printed foam or to a base wear layer in accord with the foregoing examples.

[0095] A surface covering and process for its manufacture has been provided which readily avoids the problems and shortcomings associated with the prior art. The preferred embodiment has been
15 illustrated and described. Further modifications and improvements may be made thereto as may occur to those of ordinary skill in the art and all such changes as fall within the true spirit and scope of this invention are to be included within the scope of the claims to follow.

What is Claimed is:

1. A method of making a surface covering which comprises the sequential steps of:

- 5 (a) applying over a substrate a plastic layer containing a foaming agent,
- (b) heating the plastic layer to a temperature which gells the plastic layer without activating the foaming agent to form a gelled plastic layer having a surface,
- 10 (c) applying to the surface of the gelled plastic layer a first printing ink containing a photoinitiator in a first pattern or a first design,
- (d) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,
- 15 (e) applying a curable coating over the gelled plastic layer and the first and second printing inks,
- (f) gelling the curable coating,
- (g) heating to soften the gelled curable coating,
- 20 (h) mechanically embossing the softened curable coating,
- (i) activating the photoinitiator and curing the surface areas of the curable coating disposed over the first and second printing inks,
- (j) heating to activate the foaming agent and fuse the curable coating, the plastic layer and the substrate together, wherein
25 foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,
- (k) optionally mechanically embossing the curable coating
30 in areas that are not disposed over the first and second printing inks.

2. The method of claim 1 wherein the curable coating is cured following fusion by subjecting the surface covering to electron beam radiation.

3. The method of claim 2 wherein the surface covering is subjected to electron beam radiation following mechanical embossing in step (k).

4. The method of claim 1 wherein the curable coating contains a thermal crosslinking initiator and the curable coating is cured by heat during fusion.

5. The method of claim 1, further comprising applying a polyurethane coating after optionally mechanically embossing.

6. The method of claim 1, wherein the surface covering is selected from the group consisting of sheet flooring, tile and wall covering.

7. The method of claim 1, wherein the surface covering is cooled prior to heating to soften the gelled curable coating.

8. The method of claim 1, wherein the surface covering is cooled and then the surface is reheated to soften it prior to optionally mechanically embossing.

9. The method of claim 1, wherein after gelling the plastic layer the surface covering is cooled prior to applying the printing ink.

10. The method of claim 1, wherein said curable coating contains a thermal crosslinking initiator.

11. The method of claim 7, wherein said thermal crosslinking initiator is peroxide.

12. The method of claim 8, wherein said curable coating contains solid particulates.

13. The method of claim 1, further comprising applying one or more than one additional printing ink(s) to the surface of the gelled plastic layer.

14. The method of claim 13, wherein one or more than one of said additional printing ink(s) contains a photoinitiator.

15. The method of claim 13, wherein one or more than one of said additional printing ink(s) contains an inhibitor.

16. The method of claim 14, wherein one or more than one of said additional printing inks containing a photoinitiator also contains an
5 inhibitor.

17. A method of making a surface covering which comprises the sequential steps of:

- (a) applying a plastic layer over a substrate,
- (b) heating the plastic layer to a temperature which gells the plastic layer,
10
- (c) applying a printing ink containing a photoinitiator onto the gelled plastic layer in a pattern or a design,
- (d) applying a curable coating over the gelled plastic layer and the printing ink,
- (e) gelling the curable coating,
15
- (f) heating to soften the gelled curable coating,
- (g) mechanically embossing the softened curable coating,
- (h) activating the photoinitiator and curing the curable coating disposed over the printing ink,
- (i) heating to cure uncured portions of the curable coating
20 and fuse the thereby cured coating, the plastic layer and the substrate together.

18. The method of claim 17 further comprising mechanically embossing the cured coating in areas that are not disposed over the
25 printing ink.

19. The method of claim 17, further comprising applying a polyurethane coating after mechanically embossing the cured coating that is uncured.

20. The method of claim 17, wherein the surface covering is
30 selected from the group consisting of sheet flooring, tile and wall covering.

21. The method of claim 17, wherein the surface covering is cooled prior to curing the curable coating.

22. The method of claim 17, wherein the surface covering is cooled following curing the curable coating.

23. The method of claim 17, wherein after gelling the plastic layer the surface covering is cooled prior to applying the printing ink.

5 24. The method of claim 17, wherein said curable coating contains a thermal crosslinking initiator.

25. The method of claim 17, wherein said thermal crosslinking initiator is peroxide.

10 26. The method of claim 17, wherein said curable coating contains solid particulates.

27. The method of claim 17, further comprising applying one or more than one additional printing ink(s) onto the gelled plastic layer before applying said curable coating.

15 28. The method of claim 27, wherein one or more than one of said additional printing ink(s) contains a photoinitiator and/or an inhibitor.

29. The method of claim 17 wherein the curable coating comprises a curable acrylic monomer and/or oligomer.

20 30. The method of claim 17 wherein the plastic layer contains a foaming or blowing agent, one or more than one printing ink(s) further contains an inhibitor, heating to gel the plastic layer is not sufficient to activate the foaming or blowing agent, and heating in step (i) is sufficient to activate the foaming or blowing agent and relax the mechanical embossing in surface areas disposed over areas not printed with an ink comprising a photoinitiator.

25 31. A surface covering which comprises:

- (a) a substrate,
- (b) a foamed and chemically embossed plastic layer overlaying the substrate,
- (c) an ink containing a photoinitiator printed in a design on
- 30 said foamed plastic layer,
- (d) a cured coating or a cured layer overlaying the foamed plastic layer and ink wherein the portion of the cured coating or the

cured layer disposed over the ink is chemically and mechanically embossed.

32. The surface covering of claim 31 wherein the ink also contains an inhibitor.

5 33. The surface covering of claim 31 wherein the portion of the cured coating or cured layer which is not disposed over the ink is mechanically embossed with a texture different from the mechanically embossed portion of the cured coating disposed over the ink.

10 34. The surface covering of claim 31 further comprising a polyurethane coating overlaying the cured coating or cured layer.

35. A surface covering which comprises:

- (a) a substrate,
- (b) a plastic layer overlaying the substrate,
- (c) an ink containing a photoinitiator printed in a design on
- 15 said plastic layer,
- (d) a cured coating or a cured layer overlaying the plastic layer and the ink wherein the cured coating or the cured layer overlaying the ink is mechanically embossed.

20 36. The surface covering of claim 35 further comprising a polyurethane coating overlaying the cured and embossed cured coating or cured layer.

37. A method of making a surface covering which comprises the sequential steps of:

- (a) applying over a substrate a plastic layer containing a
- 25 foaming agent,
- (b) applying to the surface of the plastic layer a first printing ink containing a photoinitiator in a first pattern or a first design,
- (c) applying to the surface of the gelled plastic layer a
- 30 second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,

(d) applying a curable layer over the plastic layer and the first and second printing inks,

(e) heating to soften the curable layer,

(f) mechanically embossing the softened curable layer,

5 (g) activating the photoinitiator and curing the surface areas of the curable layer disposed over the first and second printing inks,

(h) heating to activate the foaming agent, cure uncured portions of the curable layer, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

10 (i) optionally mechanically embossing the cured coating in areas that are not disposed over the first and second printing inks.

15 38. The method of claim 37, further comprising applying a polyurethane coating after optionally mechanically embossing.

39. The method of claim 37, further comprising applying additional printing ink(s) after application of said second printing ink and before applying said plastisol coating.

20 40. The method of claim 37 wherein the plastic layer is applied as a liquid followed by heating the plastic layer to a temperature which gels the plastic layer without activity the foaming agent to form a gelled plastic layer having a surface.

41. The method of claim 37 wherein the plastic layer is adhered over the substrate.

42. The method of claim 41 wherein the plastic layer is adhered by laminating.

43. The method of claim 37 wherein the curable layer is applied as a liquid followed by gelling the curable layer.

30 44. The method of claim 37 wherein the curable layer is adhered over the plastic layer and the first and second printing inks.

45. The method of claim 44 wherein the curable layer is adhered by laminating.

46. A method of making a surface covering which comprises the sequential steps of:

- 5 (a) applying over a substrate a plastic layer containing a foaming agent,
- (b) heating the plastic layer to a temperature which gells the plastic layer without activating the foaming agent to form a gelled plastic layer having a surface,
- 10 (c) applying to the surface of the gelled plastic layer a first printing ink containing a photoinitiator in a first pattern or a first design,
- (d) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,
- 15 (e) applying a curable coating over the gelled plastic layer and the first and second printing inks,
- (f) gelling the curable coating,
- (g) applying to the surface of the gelled curable coating a top coat wear layer comprising an ultraviolet curable, waterborne polyurethane free of photoinitiator,
- 20 (h) drying the top coat wear layer,
- (i) heating to soften the gelled curable coating,
- (j) mechanically embossing the top coat wear layer and the softened curable coating,
- 25 (k) activating the photoinitiator and curing the surface areas of the curable coating disposed over the first and second printing inks,
- (l) heating to activate the foaming agent and fuse the curable coating, the plastic layer and the substrate together, wherein
- 30 foaming of the plastic layer underlying the second printing ink is

inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

(m) optionally mechanically embossing the curable coating in areas that are not disposed over the first and second printing inks,

5 (n) coating the top coat wear layer with a solution of alcohol and a photoinitiator,

(o) evaporating the alcohol,

(p) activating the photoinitiator in the top coat wear layer to cure the top coat wear layer.

10 47. The method of claim 46 wherein the curable coating contains an ultraviolet curable photopolymer.

48. A method of making a surface covering which comprises the sequential steps of:

(a) applying a plastic layer over a substrate,

15 (b) heating the plastic layer to a temperature which gells the plastic layer,

(c) applying a printing ink containing a photoinitiator onto the gelled plastic layer in a pattern or a design,

(d) applying a curable coating over the gelled plastic layer and the printing ink,

20 (e) gelling the curable coating,

(f) applying to the surface of the gelled curable coating a top coat wear layer comprising an ultraviolet curable, waterborne polyurethane free of photoinitiator,

25 (g) drying the topcoat wear layer,

(h) heating to soften the gelled curable coating,

(i) mechanically embossing the top coat wear layer and the softened curable coating,

30 (j) activating the photoinitiator and curing the curable coating disposed over the printing ink,

(k) heating to cure uncured portions of the curable coating and fuse the thereby cured coating, the top coat wear layer, the plastic layer and the substrate together.

49. The method of claim 48 further comprising mechanically
5 embossing the cured coating in areas that are not disposed over the printing ink.

50. The method of claim 48 wherein the curable coating further comprises an ultraviolet curable photopolymer.

51. A method of making a surface covering which comprises the
10 sequential steps of:

(a) applying over a substrate a plastic layer containing a foaming agent,

(b) applying to the surface of the plastic layer a first
15 printing ink containing a photoinitiator in a first pattern or a first design,

(c) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,

(d) applying a curable layer over the plastic layer and the
20 first and second printing inks,

(e) gelling the curable layer,

(f) applying to the surface of the gelled curable layer a top coat wear layer comprising an ultraviolet curable, waterborne polyurethane free photoinitiator,

25 (g) drying the top coat wear layer,

(h) heating to soften the curable layer,

(i) mechanically embossing the top coat wear layer and the softened curable layer,

(j) activating the photoinitiator and curing the surface
30 areas of the curable layer disposed over the first and second printing inks,

(k) heating to activate the foaming agent, cure uncured portions of the curable layer, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

(l) optionally mechanically embossing the cured coating in areas that are not disposed over the first and second printing inks,

(m) coating the top coat wear layer with a solution of alcohol and a photoinitiator,

(n) evaporating the alcohol,

(o) activating the photoinitiator in the top coat wear layer to cure the top coat wear layer.

52. A method of making a surface covering which comprises the sequential steps of:

(a) applying over a substrate a plastic layer containing a foaming agent,

(b) heating the plastic layer to a temperature which gells the plastic layer without activating the foaming agent to form a gelled plastic layer having a surface,

(c) applying to the surface of the gelled plastic layer a first printing ink containing said first photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength greater than about 400 nanometers, in a first pattern or a first design,

(d) applying to the surface of the gelled plastic layer a second printing ink containing said first photoinitiator and an expansion inhibitor in a second pattern or a second design,

(e) applying a curable coating over the gelled plastic layer and the first and second printing inks,

(f) gelling the curable coating,

(g) applying to the surface of the gelled curable coating a top coat wear layer comprising a second photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength less than

about 350 nanometers, and an ultraviolet curable, waterborne polyurethane,

- (h) drying the top coat wear layer,
- (i) heating to soften the gelled curable coating,
- 5 (j) mechanically embossing the top coat wear layer and the softened curable coating,
- (k) activating the first photoinitiator and curing the surface areas of the curable coating disposed over the first and second printing inks,
- 10 (l) heating to activate the foaming agent and fuse the curable coating, the plastic layer and the substrate together, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,
- 15 (m) optionally mechanically embossing the curable coating in areas that are not disposed over the first and second printing inks,
- (n) activating the second photoinitiator and curing the top coat wear layer.

53. A method of making a surface covering which comprises the
20 sequential steps of:

- (a) applying a plastic layer over a substrate,
- (b) heating the plastic layer to a temperature which gells the plastic layer,
- (c) applying a printing ink containing a first photoinitiator
25 which reacts when exposed to ultraviolet radiation having a wavelength greater than about 400 nanometers onto the gelled plastic layer in a pattern or a design,
- (d) applying a curable coating over the gelled plastic layer and the printing ink,
- 30 (e) gelling the curable coating,
- (f) applying to the surface of the gelled curable coating a top coat wear layer comprising a second photoinitiator which reacts

when exposed to ultraviolet radiation having a wavelength less than about 350 nanometers, and an ultraviolet curable, waterborne polyurethane,

- 5 (g) drying the top coat wear layer,
- (h) heating to soften the gelled curable coating,
- (i) mechanically embossing the softened curable coating,
- (j) activating the photoinitiator and curing the curable coating disposed over the printing ink,
- (k) heating to cure uncured portions of the curable coating
- 10 and fuse the thereby cured coating, the plastic layer and the substrate together,
- (l) activating the second photoinitiator and curing the top coat wear layer.

54. A method of making a surface covering which comprises the
15 sequential steps of:

- (a) applying over a substrate a plastic layer containing a foaming agent,
- (b) applying to the surface of the plastic layer a first printing ink containing a first photoinitiator which reacts when
20 exposed to ultraviolet radiation having a wavelength greater than about 400 nanometers, in a first pattern or a first design,
- (c) applying to the surface of the gelled plastic layer a second printing ink containing said first photoinitiator and an expansion inhibitor in a second pattern or a second design,
- 25 (d) applying a curable layer over the plastic layer and the first and second printing inks,
- (e) gelling the curable layer,
- (f) applying to the surface of the gelled curable layer a top coat wear layer comprising a second photoinitiator which reacts
30 when exposed to ultraviolet radiation having a wavelength less than about 350 nanometers, and an ultraviolet curable, waterborne polyurethane,

- (g) drying the top coat wear layer,
- (h) heating to soften the curable layer,
- (i) mechanically embossing the top coat wear layer and the softened curable layer,
- 5 (j) activating the first photoinitiator and curing the surface areas of the curable layer disposed over the first and second printing inks,
- (k) heating to activate the foaming agent, cure uncured portions of the curable layer, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,
- 10 (l) optionally mechanically embossing the cured coating in areas that are not disposed over the first and second printing inks,
- 15 (m) activating the second photoinitiator and curing the top coat wear layer.

55. A surface covering which comprises:

- (a) a substrate,
- (b) a foamed and chemically embossed plastic layer
- 20 overlaying the substrate,
- (c) an ink containing a photoinitiator printed in a design on said foamed plastic layer,
- (d) a cured coating or a cured layer overlaying the foamed plastic layer and ink wherein the portion of the cured coating or the
- 25 cured layer disposed over the ink is chemically and mechanically embossed,
- (e) a chemically and mechanically embossed top coat wear layer comprised of polyurethane.

56. A surface covering which comprises:


- 30 (a) a substrate,
- (b) a plastic layer overlaying the substrate,

(c) an ink containing a photoinitiator printed in a design on said plastic layer,

(d) a cured coating or a cured layer overlaying the plastic layer and the ink wherein the cured coating or the cured layer overlaying the ink is mechanically embossed,

5

(e) a mechanically embossed top coat wear layer comprised of polyurethane.

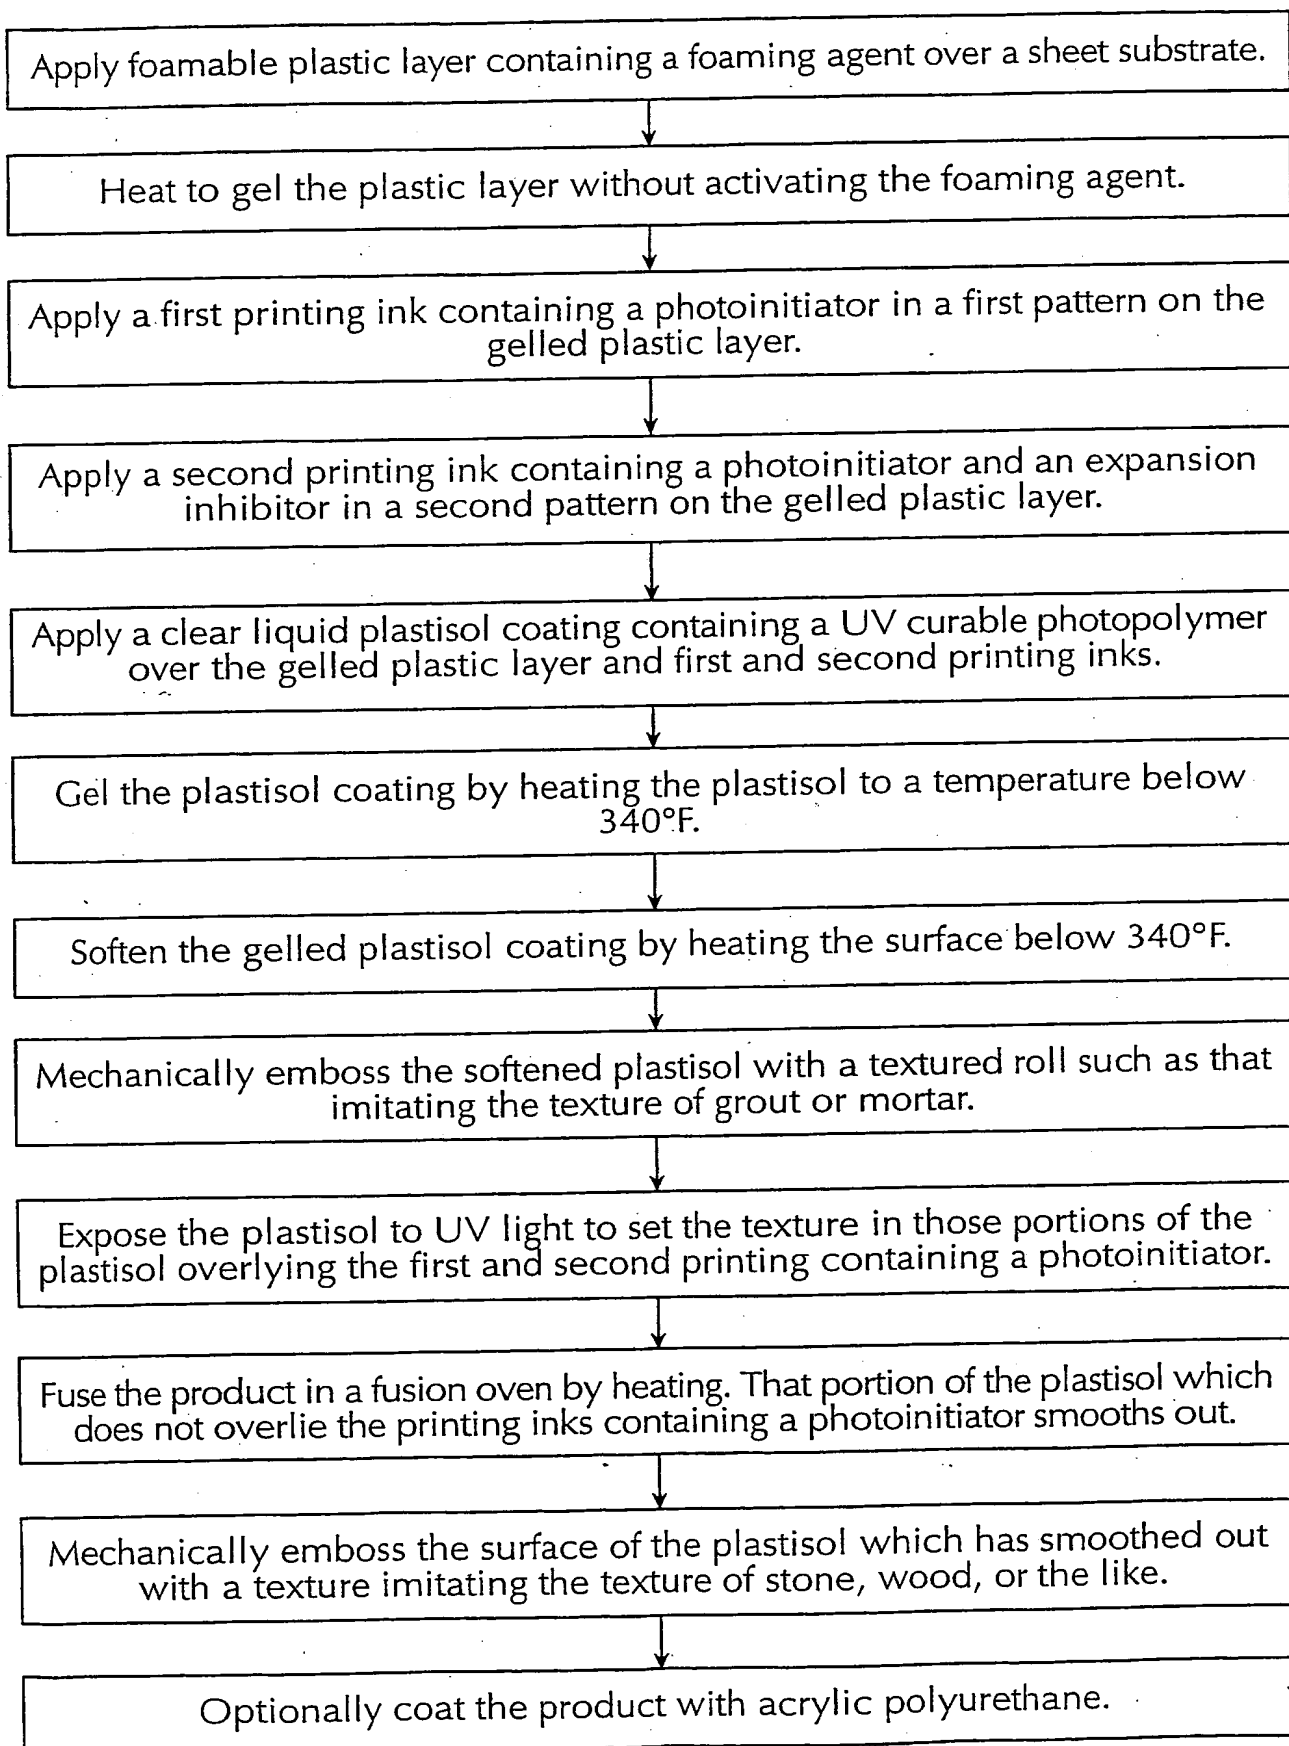1/2
FIG. 1

2/2

FIG. 2

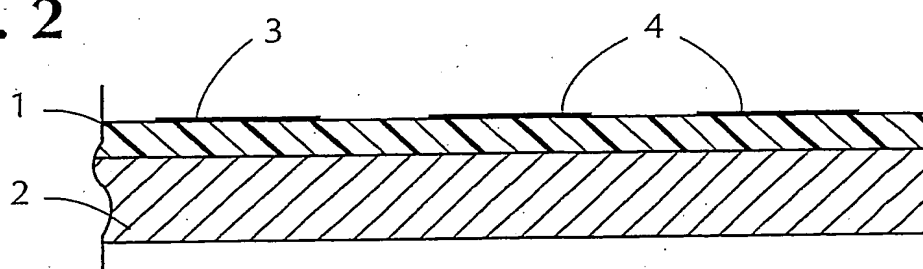


FIG. 3


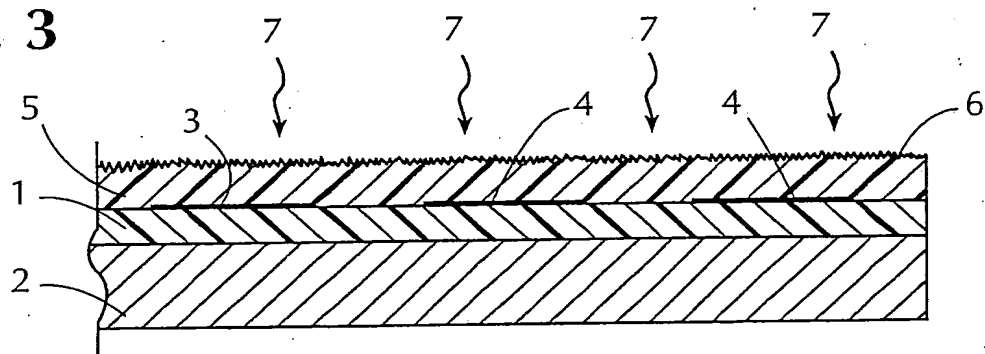


FIG. 4



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

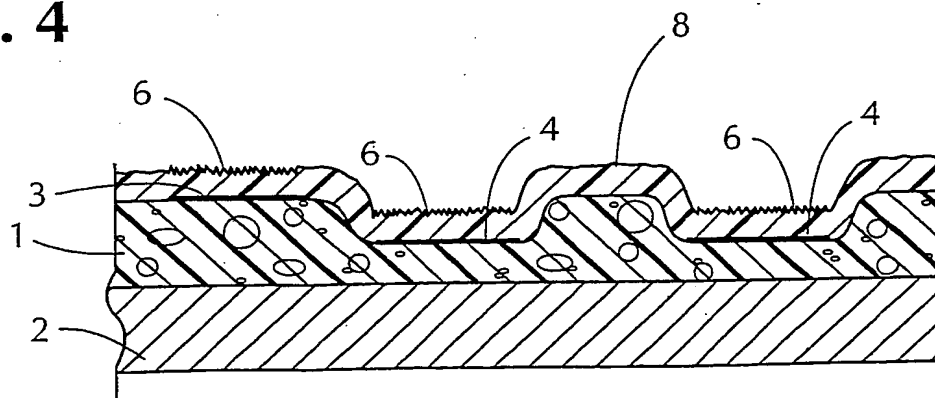

(43) International Publication Date
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number
WO 2003/057458 A3

(51) International Patent Classification⁷: B44C 1/20, 1/24,
B44F 7/00, 11/00, B32B 31/00, B41M 1/24

(21) International Application Number:
PCT/CA2003/000008

(22) International Filing Date: 8 January 2003 (08.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/046,019 11 January 2002 (11.01.2002) US
10/321,617 18 December 2002 (18.12.2002) US

(71) Applicant: TARKETT INC. [CA/CA]; 1001 Yamaska
Street East, Farnham, Quebec J2N 1J7 (CA).

(72) Inventors: COURTOY, Jean-François; 1570 du Mont
Street, St-Bruno de Montarville, Quebec J3V 4L5 (CA).

MENARD, René; 208 William Street, Cowansville, Que-
bec J2K 1L2 (CA). CALDAS, Victor; 117 du Nord Street,
#12, Cowansville, Quebec J2K 2L6 (CA). CHAREST,
Claude; 1647 Dablon Street, St-Bruno de Montarville,
Quebec J3V 4S7 (CA).


(74) Agents: DUBUC, J. et al.; Goudreau Gage Dubuc, Stock
Exchange Tower, 800 Place Victoria, Suite 3400, P.O. Box
242, Montreal, Quebec H4Z 1E9 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: SELECTIVELY EMBOSSED SURFACE COVERINGS AND PROCESSES OF MANUFACTURE

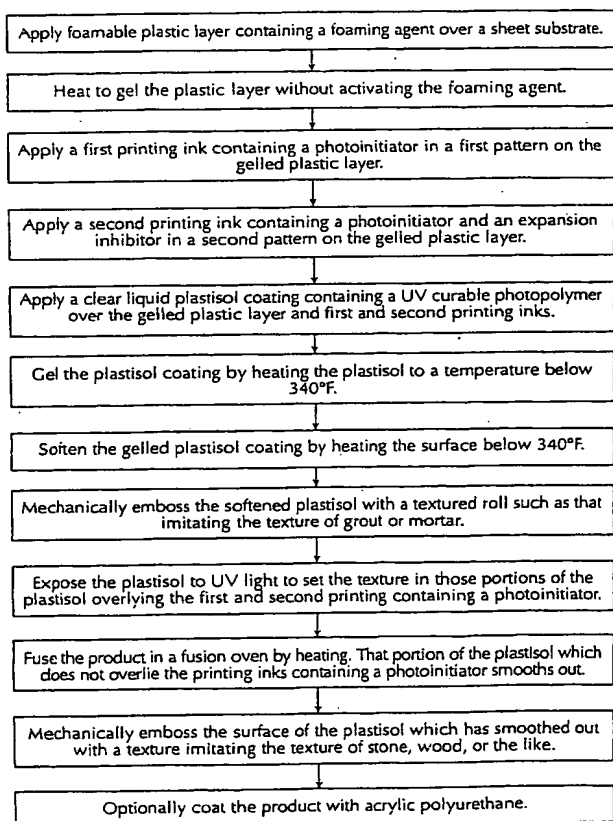

(57) Abstract: Selectivity embossed surface coverings are prepared by mechanically embossing a wear layer which overlays at least one printing ink containing a photoinitiator which has been printed in a pattern or design. The embossed wear layer is subjected to ultraviolet radiation which causes curing of the wear layer in the surface areas disposed over the printing ink. The product then is fused whereby the mechanical embossing in surface areas which are not disposed over the printing ink relaxes and becomes smooth. In a variant of the invention, a thermoplastic wear layer is employed which can be mechanically embossed in the surface areas which are not disposed over the printing ink with a texture different from the first applied mechanical embossing. In another variant, two different spectral regions of UV curing radiation are used so that a urethane coating can be employed as a top coat with a selectively embossed surface.

WO 2003/057458 A3



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
25 March 2004

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/00008

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B44C1/20 B44C1/24 B44F7/00 B44F11/00 B32B31/00
B41M1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B44C B44F B32B B41M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
------------	--	-----------------------

X	DE 44 21 557 C (OSMETRIC ENTWICKLUNGS- UND PRODUKTIONS-GMBH & CO) 17 August 1995 (1995-08-17)	35
Y	see abstract column 1, line 3 -column 6, line 50	31,55,56
X	EP 0 051 821 A (DYNAMIT NOBEL AKTIENGESELLSCHAFT) 19 May 1982 (1982-05-19)	35
Y	see abstract page 17, line 3 -page 19, last line; claims 1,9-12	31,55,56

-/--



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

28 October 2003

Date of mailing of the international search report

05/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Greiner, E

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CA 03/00008

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 146 711 A (JEAN-FRANCOIS COURTOY ET AL.) 14 November 2000 (2000-11-14) cited in the application	31, 55, 56
A	the whole document	1-30, 32-34, 36-54
A	GB 2 193 469 A (SMALL PRODUCTS LIMITED) 10 February 1988 (1988-02-10) the whole document	1-56
A	DE 198 42 510 A (REISEWITZ BESCHICHTUNGS GMBH) 23 March 2000 (2000-03-23) the whole document	1-56
A	WO 00 30869 A (E.I. DU PONT DE NEMOURS AND COMPANY) 2 June 2000 (2000-06-02) the whole document	1-56
A	DE 24 16 737 A (NIPPON PAINT CO.) 17 October 1974 (1974-10-17) the whole document	1-56
A	US 3 458 337 A (G. R. RUGG) 29 July 1969 (1969-07-29) cited in the application the whole document	1-56
A	US 3 887 678 A (WALTER J. LEWICKI, JR.) 3 June 1975 (1975-06-03) the whole document	1-56
A	US 4 298 646 A (LAWRENCE F. HAEMER ET AL.) 3 November 1981 (1981-11-03) cited in the application the whole document	1-56
A	US 4 608 294 A (JEAN-FRANCOIS COURTOY ET AL.) 26 August 1986 (1986-08-26) the whole document	1-56

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/00008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4421557	C	17-08-1995	DE 4421557 C1	17-08-1995
EP 0051821	A	19-05-1982	DE 3041794 A1	13-05-1982
			AT 7383 T	15-05-1984
			CA 1180863 A1	15-01-1985
			DE 3163535 D1	14-06-1984
			EP 0051821 A1	19-05-1982
			JP 57111273 A	10-07-1982
			US 4443392 A	17-04-1984
US 6146711	A	14-11-2000	US 5679721 A	21-10-1997
			US 6586108 B1	01-07-2003
			AU 4661196 A	18-09-1996
			CA 2213741 A1	06-09-1996
			WO 9626987 A1	06-09-1996
			CN 1183794 A	03-06-1998
			DE 69623936 D1	31-10-2002
			DE 69623936 T2	15-05-2003
			EP 0812343 A1	17-12-1997
			JP 3032017 B2	10-04-2000
			JP 10507488 T	21-07-1998
			KR 243982 B1	01-02-2000
			NO 973932 A	27-10-1997
GB 2193469	A	10-02-1988	AT 58091 T	15-11-1990
			AU 593938 B2	22-02-1990
			AU 7780487 A	24-02-1988
			CA 1288296 C	03-09-1991
			DE 3766109 D1	13-12-1990
			DK 169288 A	28-03-1988
			EP 0317563 A1	31-05-1989
			ES 2004960 A6	16-02-1989
			FI 890431 A	27-01-1989
			WO 8800889 A1	11-02-1988
			GR 871219 A1	11-12-1987
			JP 1503771 T	21-12-1989
			JP 5015388 B	01-03-1993
			US 4927663 A	22-05-1990
DE 19842510	A	23-03-2000	DE 19842510 A1	23-03-2000
WO 0030869	A	02-06-2000	AT 233662 T	15-03-2003
			AU 751413 B2	15-08-2002
			AU 1553600 A	13-06-2000
			CN 1326407 T	12-12-2001
			DE 59904492 D1	10-04-2003
			DK 1135267 T3	05-05-2003
			WO 0030869 A1	02-06-2000
			EP 1135267 A1	26-09-2001
			ES 2190274 T3	16-07-2003
			JP 2002530231 T	17-09-2002
DE 2416737	A	17-10-1974	JP 900435 C	15-03-1978
			JP 49125106 A	29-11-1974
			JP 52028041 B	23-07-1977
			AU 6766174 A	09-10-1975
			BE 813362 A1	07-10-1974
			CA 1039445 A1	26-09-1978

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/00008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 2416737	A		DE 2416737 A1	17-10-1974
			DK 145658 B	17-01-1983
			FR 2224297 A1	31-10-1974
			GB 1481212 A	27-07-1977
US 3458337	A	29-07-1969	DE 1629612 A1	04-02-1971
			GB 1163962 A	10-09-1969
US 3887678	A	03-06-1975	US 3953639 A	27-04-1976
			BE 808359 A1	29-03-1974
			CA 1011638 A1	07-06-1977
			CH 574728 A5	30-04-1976
			DE 2361870 A1	04-07-1974
			DK 135415 B	25-04-1977
			FR 2210512 A1	12-07-1974
			GB 1456374 A	24-11-1976
			IE 38631 B1	26-04-1978
			IT 1008079 B	10-11-1976
			JP 49089756 A	27-08-1974
			LU 68960 A1	12-02-1974
			NL 7317128 A	18-06-1974
			SE 402418 B	03-07-1978
US 4298646	A	03-11-1981	CA 1153935 A1	20-09-1983
US 4608294	A	26-08-1986	LU 84765 A1	28-11-1984
			LU 84957 A1	24-04-1985
			AT 28761 T	15-08-1987
			BE 899486 A1	16-08-1984
			CA 1251764 A1	28-03-1989
			DE 3465208 D1	10-09-1987
			DK 206884 A	26-10-1984
			EP 0123308 A1	31-10-1984
			ES 8503574 A1	16-06-1985
			FR 2544635 A1	26-10-1984
			GR 81939 A1	12-12-1984
			IE 55251 B1	18-07-1990
			IT 1209533 B	30-08-1989
			JP 1828917 C	15-03-1994
			JP 5036232 B	28-05-1993
			JP 59207240 A	24-11-1984
			NO 841604 A ,B,	26-10-1984
			PT 78481 A ,B	01-05-1984
			US RE33599 E	28-05-1991
			AT 28910 T	15-08-1987
			CA 1251763 A1	28-03-1989
			DE 3465354 D1	17-09-1987
			DK 206984 A	26-10-1984
			EP 0126314 A1	28-11-1984
			ES 8503573 A1	16-06-1985
			FR 2544634 A1	26-10-1984
			GR 81940 A1	12-12-1984
			IE 55252 B1	18-07-1990
			IT 1209535 B	30-08-1989
			JP 1898622 C	23-01-1995
			JP 6015233 B	02-03-1994
			JP 59204983 A	20-11-1984
			NO 841605 A ,B,	26-10-1984

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/00008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4608294	A	PT 78482 A , B	01-05-1984
		US RE33069 E	26-09-1989
		US 4617222 A	14-10-1986

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number
WO 2003/057458 A3

(51) International Patent Classification⁷: B44C 1/20, 1/24,
B44F 7/00, 11/00, B32B 31/00, B41M 1/24

(21) International Application Number:
PCT/CA2003/000008

(22) International Filing Date: 8 January 2003 (08.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/046,019 11 January 2002 (11.01.2002) US
10/321,617 18 December 2002 (18.12.2002) US

(71) Applicant: TARKETT INC. [CA/CA]; 1001 Yamaska
Street East, Farnham, Quebec J2N 1J7 (CA).

(72) Inventors: COURTOY, Jean-François; 1570 du Mont
Street, St-Bruno de Montarville, Quebec J3V 4L5 (CA).
MENARD, René; 208 William Street, Cowansville, Que-
bec J2K 1L2 (CA). CALDAS, Victor; 117 du Nord Street,
#12, Cowansville, Quebec J2K 2L6 (CA). CHAREST,

Claude; 1647 Dablon Street, St-Bruno de Montarville,
Quebec J3V 4S7 (CA).


(74) Agents: DUBUC, J. et al.; Goudreau Gage Dubuc, Stock
Exchange Tower, 800 Place Victoria, Suite 3400, P.O. Box
242, Montreal, Quebec H4Z 1E9 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SELECTIVELY EMBOSSED SURFACE COVERINGS AND PROCESSES OF MANUFACTURE

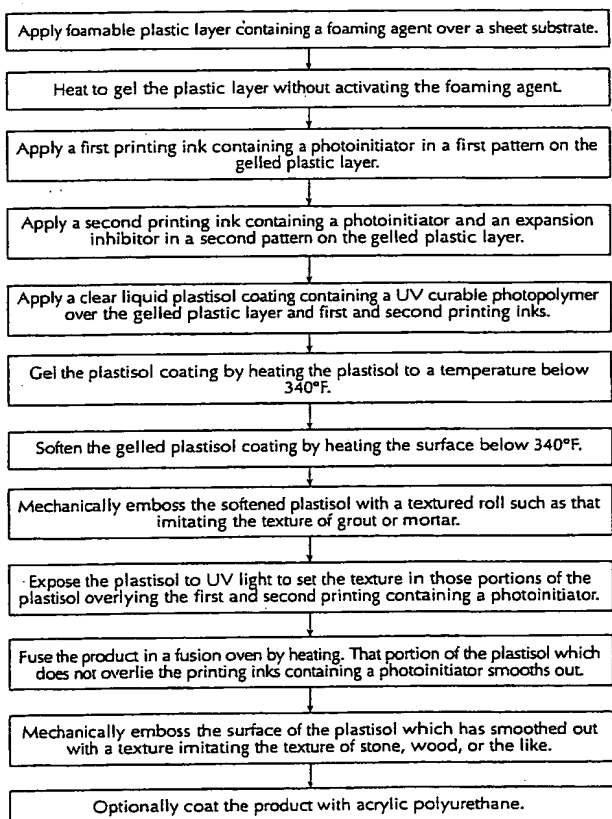

(57) Abstract: Selectivity embossed surface coverings are prepared by mechanically embossing a wear layer which overlays at least one printing ink containing a photoinitiator which has been printed in a pattern or design. The embossed wear layer is subjected to ultraviolet radiation which causes curing of the wear layer in the surface areas disposed over the printing ink. The product then is fused whereby the mechanical embossing in surface areas which are not disposed over the printing ink relaxes and becomes smooth. In a variant of the invention, a thermoplastic wear layer is employed which can be mechanically embossed in the surface areas which are not disposed over the printing ink with a texture different from the first applied mechanical embossing. In another variant, two different spectral regions of UV curing radiation are used so that a urethane coating can be employed as a top coat with a selectively embossed surface.

WO 2003/057458 A3



Published:

- with international search report
- with amended claims

Date of publication of the amended claims: 6 May 2004

(88) Date of publication of the international search report:
25 March 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AMENDED CLAIMS

**[Received by the International Bureau on 29 December 2003 (29.12.03):
original claims 1-56 replaced by amended claims 1-59 (15 pages)]**

1. A method of making a surface covering which comprises the sequential steps of:

5 (a) applying over a substrate a plastic layer containing a foaming agent,

(b) heating the plastic layer to a temperature which gells the plastic layer without activating the foaming agent to form a gelled plastic layer having a surface,

10 (c) applying to the surface of the gelled plastic layer a first printing ink containing a photoinitiator in a first pattern or a first design,

(d) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,

15 (e) applying a curable coating over the gelled plastic layer and the first and second printing inks,

(f) gelling the curable coating,

(g) heating to soften the gelled curable coating,

20 (h) mechanically embossing the softened curable coating,

(i) activating the photoinitiator and curing the surface areas of the curable coating disposed over the first and second printing inks,

25 (j) heating to activate the foaming agent and fuse the curable coating, the plastic layer and the substrate together, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

30 (k) optionally mechanically embossing the curable coating in areas that are not disposed over the first and second printing inks.

2. The method of claim 1 wherein the curable coating is cured following fusion by subjecting the surface covering to electron beam radiation.
3. The method of claim 2 wherein the surface covering is
5 subjected to electron beam radiation following mechanical embossing in step (k).
4. The method of claim 1 wherein the curable coating contains a thermal crosslinking initiator and the curable coating is cured by heat during fusion.
- 10 5. The method of claim 1, further comprising applying a polyurethane coating after optionally mechanically embossing.
6. The method of claim 1, wherein the surface covering is selected from the group consisting of sheet flooring, tile and wall covering.
7. The method of claim 1, wherein the surface covering is
15 cooled prior to heating to soften the gelled curable coating.
8. The method of claim 1, wherein the surface covering is cooled and then the surface is reheated to soften it prior to optionally mechanically embossing.
9. The method of claim 1, wherein after gelling the plastic layer
20 the surface covering is cooled prior to applying the printing ink.
10. The method of claim 1, wherein said curable coating contains a thermal crosslinking initiator.
11. The method of claim 7, wherein said thermal crosslinking initiator is peroxide.
- 25 12. The method of claim 8, wherein said curable coating contains solid particulates.

13. The method of claim 1, further comprising applying one or more than one additional printing ink(s) to the surface of the gelled plastic layer.

14. The method of claim 13, wherein one or more than one of
5 said additional printing ink(s) contains a photoinitiator.

15. The method of claim 13, wherein one or more than one of said additional printing ink(s) contains an inhibitor.

16. The method of claim 14, wherein one or more than one of
10 said additional printing inks containing a photoinitiator also contains an inhibitor.

17. A method of making a surface covering which comprises the sequential steps of:

- (a) applying a plastic layer over a substrate,
- (b) heating the plastic layer to a temperature which gells
15 the plastic layer,
- (c) applying a printing ink containing a photoinitiator onto the gelled plastic layer in a pattern or a design,
- (d) applying a curable coating over the gelled plastic layer and the printing ink,
- 20 (e) gelling the curable coating,
- (f) heating to soften the gelled curable coating,
- (g) mechanically embossing the softened curable coating,
- (h) activating the photoinitiator and curing the curable coating disposed over the printing ink,
- 25 (i) heating to cure uncured portions of the curable coating and fuse the thereby cured coating, the plastic layer and the substrate together.

18. The method of claim 17 further comprising mechanically embossing the cured coating in areas that are not disposed over the printing ink.

19. The method of claim 17, further comprising applying a polyurethane coating after mechanically embossing the cured coating that is uncured.

20. The method of claim 17, wherein the surface covering is selected from the group consisting of sheet flooring, tile and wall covering.

21. The method of claim 17, wherein the surface covering is cooled prior to curing the curable coating.

22. The method of claim 17, wherein the surface covering is cooled following curing the curable coating.

23. The method of claim 17, wherein after gelling the plastic layer the surface covering is cooled prior to applying the printing ink.

24. The method of claim 17, wherein said curable coating contains a thermal crosslinking initiator.

25. The method of claim 17, wherein said thermal crosslinking initiator is peroxide.

26. The method of claim 17, wherein said curable coating contains solid particulates.

27. The method of claim 17, further comprising applying one or more than one additional printing ink(s) onto the gelled plastic layer before applying said curable coating.

28. The method of claim 27, wherein one or more than one of said additional printing ink(s) contains a photoinitiator and/or an inhibitor.

29. The method of claim 17 wherein the curable coating comprises a curable acrylic monomer and/or oligomer.

30. The method of claim 17 wherein the plastic layer contains a foaming or blowing agent, one or more than one printing ink(s) further
5 contains an inhibitor, heating to gel the plastic layer is not sufficient to activate the foaming or blowing agent, and heating in step (i) is sufficient to activate the foaming or blowing agent and relax the mechanical embossing in surface areas disposed over areas not printed with an ink comprising a photoinitiator.

10 31. A surface covering which comprises:
(a) a substrate,
(b) a foamed and chemically embossed plastic layer overlaying the substrate,
(c) an ink containing a photoinitiator printed in a design on
15 said foamed plastic layer,
(d) a cured coating or a cured layer overlaying the foamed plastic layer and ink wherein the portion of the cured coating or the cured layer disposed over the ink is chemically embossed and mechanically embossed with a first mechanically embossed texture
20 having relatively deep emboss depths as compared with a matting grain.

32. The surface covering of claim 31 wherein the ink also contains an inhibitor.

25 33. The surface covering of claim 31 wherein the portion of the cured coating or cured layer which is not disposed over the ink is mechanically embossed with a second mechanically embossed texture different from the first mechanically embossed texture.

34. The surface covering of claim 31 further comprising a polyurethane coating overlaying the cured coating or cured layer.

35. A surface covering which comprises:

- (a) a substrate,
- (b) a plastic layer overlaying the substrate,
- (c) an ink containing a photoinitiator printed in a design on
5 said plastic layer,
- (d) a cured coating or a cured layer overlaying the plastic layer and the ink wherein the cured coating or the cured layer overlaying the ink is mechanically embossed with a mechanically embossed texture having relatively deep emboss depths as
10 compared with a matting grain.

36. The surface covering of claim 35 further comprising a polyurethane coating overlaying the cured and embossed cured coating or cured layer.

37. A method of making a surface covering which comprises the
15 sequential steps of:

- (a) applying over a substrate a plastic layer containing a foaming agent,
- (b) applying to the surface of the plastic layer a first printing ink containing a photoinitiator in a first pattern or a first
20 design,
- (c) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,
- (d) applying a curable layer over the plastic layer and the
25 first and second printing inks,
- (e) heating to soften the curable layer,
- (f) mechanically embossing the softened curable layer,
- (g) activating the photoinitiator and curing the surface areas of the curable layer disposed over the first and second printing
30 inks,

(h) heating to activate the foaming agent, cure uncured portions of the curable layer, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

(i) optionally mechanically embossing the cured coating in areas that are not disposed over the first and second printing inks.

38. The method of claim 37, further comprising applying a polyurethane coating after optionally mechanically embossing.

39. The method of claim 37, further comprising applying additional printing ink(s) after application of said second printing ink and before applying said plastisol coating.

40. The method of claim 37 wherein the plastic layer is applied as a liquid followed by heating the plastic layer to a temperature which gels the plastic layer without activity the foaming agent to form a gelled plastic layer having a surface.

41. The method of claim 37 wherein the plastic layer is adhered over the substrate.

42. The method of claim 41 wherein the plastic layer is adhered by laminating.

43. The method of claim 37 wherein the curable layer is applied as a liquid followed by gelling the curable layer.

44. The method of claim 37 wherein the curable layer is adhered over the plastic layer and the first and second printing inks.

45. The method of claim 44 wherein the curable layer is adhered by laminating.

46. The surface covering of claim 31 wherein the first mechanically embossed texture is selected from the group consisting of sand, cementitious grout, mortar, cork, terrazzo or the like.

47. The surface covering of claim 33 wherein the second mechanically embossed texture is selected from the group consisting of ceramic tile, stone, brick, sandstone, cork, wood or combinations thereof.

48. The surface covering of claim 35 wherein the mechanically embossed texture is selected from the group consisting of sand, cementitious grout, mortar, cork, terrazzo or the like.

49. A method of making a surface covering which comprises the sequential steps of:

(a) applying over a substrate a plastic layer containing a foaming agent,

(b) heating the plastic layer to a temperature which gells the plastic layer without activating the foaming agent to form a gelled plastic layer having a surface,

(c) applying to the surface of the gelled plastic layer a first printing ink containing a photoinitiator in a first pattern or a first design,

(d) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,

(e) applying a curable coating over the gelled plastic layer and the first and second printing inks,

(f) gelling the curable coating,

(g) applying to the surface of the gelled curable coating a top coat wear layer comprising an ultraviolet curable, waterborne polyurethane free of photoinitiator,

(h) drying the top coat wear layer,

(i) heating to soften the gelled curable coating,

(j) mechanically embossing the top coat wear layer and the softened curable coating,

(k) activating the photoinitiator and curing the surface areas of the curable coating disposed over the first and second printing inks,

(l) heating to activate the foaming agent and fuse the curable coating, the plastic layer and the substrate together, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

(m) optionally mechanically embossing the curable coating in areas that are not disposed over the first and second printing inks,

(n) coating the top coat wear layer with a solution of alcohol and a photoinitiator,

(o) evaporating the alcohol,

(p) activating the photoinitiator in the top coat wear layer to cure the top coat wear layer.

50. The method of claim 49 wherein the curable coating contains an ultraviolet curable photopolymer.

51. A method of making a surface covering which comprises the sequential steps of:

(a) applying a plastic layer over a substrate,

(b) heating the plastic layer to a temperature which gells the plastic layer,

(c) applying a printing ink containing a photoinitiator onto the gelled plastic layer in a pattern or a design,

(d) applying a curable coating over the gelled plastic layer and the printing ink,

(e) gelling the curable coating,

(f) applying to the surface of the gelled curable coating a top coat wear layer comprising an ultraviolet curable, waterborne polyurethane free of photoinitiator,

(g) drying the topcoat wear layer,

5 (h) heating to soften the gelled curable coating,

(i) mechanically embossing the top coat wear layer and the softened curable coating,

(j) activating the photoinitiator and curing the curable coating disposed over the printing ink,

10 (k) heating to cure uncured portions of the curable coating and fuse the thereby cured coating, the top coat wear layer, the plastic layer and the substrate together.

52. The method of claim 51 further comprising mechanically embossing the cured coating in areas that are not disposed over the
15 printing ink.

53. The method of claim 51 wherein the curable coating further comprises an ultraviolet curable photopolymer.

54. A method of making a surface covering which comprises the sequential steps of:

20 (a) applying over a substrate a plastic layer containing a foaming agent,

(b) applying to the surface of the plastic layer a first printing ink containing a photoinitiator in a first pattern or a first design,

25 (c) applying to the surface of the gelled plastic layer a second printing ink containing a photoinitiator and an expansion inhibitor in a second pattern or a second design,

(d) applying a curable layer over the plastic layer and the first and second printing inks,

30 (e) gelling the curable layer,

(f) applying to the surface of the gelled curable layer a top coat wear layer comprising an ultraviolet curable, waterborne polyurethane free photoinitiator,

(g) drying the top coat wear layer,

5

(h) heating to soften the curable layer,

(i) mechanically embossing the top coat wear layer and the softened curable layer,

(j) activating the photoinitiator and curing the surface areas of the curable layer disposed over the first and second printing inks,

10

(k) heating to activate the foaming agent, cure uncured portions of the curable layer, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

15

(l) optionally mechanically embossing the cured coating in areas that are not disposed over the first and second printing inks,

(m) coating the top coat wear layer with a solution of alcohol and a photoinitiator,

20

(n) evaporating the alcohol,

(o) activating the photoinitiator in the top coat wear layer to cure the top coat wear layer.

55. A method of making a surface covering which comprises the sequential steps of:

25

(a) applying over a substrate a plastic layer containing a foaming agent,

(b) heating the plastic layer to a temperature which gells the plastic layer without activating the foaming agent to form a gelled plastic layer having a surface,

30

(c) applying to the surface of the gelled plastic layer a first printing ink containing said first photoinitiator which reacts when

exposed to ultraviolet radiation having a wavelength greater than about 400 nanometers, in a first pattern or a first design,

(d) applying to the surface of the gelled plastic layer a second printing ink containing said first photoinitiator and an expansion inhibitor in a second pattern or a second design,

(e) applying a curable coating over the gelled plastic layer and the first and second printing inks,

(f) gelling the curable coating,

(g) applying to the surface of the gelled curable coating a top coat wear layer comprising a second photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength less than about 350 nanometers, and an ultraviolet curable, waterborne polyurethane,

(h) drying the top coat wear layer,

(i) heating to soften the gelled curable coating,

(j) mechanically embossing the top coat wear layer and the softened curable coating,

(k) activating the first photoinitiator and curing the surface areas of the curable coating disposed over the first and second printing inks,

(l) heating to activate the foaming agent and fuse the curable coating, the plastic layer and the substrate together, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

(m) optionally mechanically embossing the curable coating in areas that are not disposed over the first and second printing inks,

(n) activating the second photoinitiator and curing the top coat wear layer.

56. A method of making a surface covering which comprises the sequential steps of:

- (a) applying a plastic layer over a substrate,
- (b) heating the plastic layer to a temperature which gells the plastic layer,
- (c) applying a printing ink containing a first photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength greater than about 400 nanometers onto the gelled plastic layer in a pattern or a design,
- (d) applying a curable coating over the gelled plastic layer and the printing ink,
- (e) gelling the curable coating,
- (f) applying to the surface of the gelled curable coating a top coat wear layer comprising a second photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength less than about 350 nanometers, and an ultraviolet curable, waterborne polyurethane,
- (g) drying the top coat wear layer,
- (h) heating to soften the gelled curable coating,
- (i) mechanically embossing the softened curable coating,
- (j) activating the photoinitiator and curing the curable coating disposed over the printing ink,
- (k) heating to cure uncured portions of the curable coating and fuse the thereby cured coating, the plastic layer and the substrate together,
- (l) activating the second photoinitiator and curing the top coat wear layer.

57. A method of making a surface covering which comprises the sequential steps of:

- (a) applying over a substrate a plastic layer containing a foaming agent,

(b) applying to the surface of the plastic layer a first printing ink containing a first photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength greater than about 400 nanometers, in a first pattern or a first design,

5 (c) applying to the surface of the gelled plastic layer a second printing ink containing said first photoinitiator and an expansion inhibitor in a second pattern or a second design,

(d) applying a curable layer over the plastic layer and the first and second printing inks,

10 (e) gelling the curable layer,

(f) applying to the surface of the gelled curable layer a top coat wear layer comprising a second photoinitiator which reacts when exposed to ultraviolet radiation having a wavelength less than about 350 nanometers, and an ultraviolet curable, waterborne polyurethane,

15 (g) drying the top coat wear layer,

(h) heating to soften the curable layer,

(i) mechanically embossing the top coat wear layer and the softened curable layer,

20 (j) activating the first photoinitiator and curing the surface areas of the curable layer disposed over the first and second printing inks,

(k) heating to activate the foaming agent, cure uncured portions of the curable layer, wherein foaming of the plastic layer underlying the second printing ink is inhibited, and the mechanical embossing in surface areas disposed over unprinted areas is relaxed,

25 (l) optionally mechanically embossing the cured coating in areas that are not disposed over the first and second printing inks,

30 (m) activating the second photoinitiator and curing the top coat wear layer.

58. A surface covering which comprises:

(a) a substrate,
(b) a foamed and chemically embossed plastic layer overlaying the substrate,

5 (c) an ink containing a photoinitiator printed in a design on said foamed plastic layer,

(d) a cured coating or a cured layer overlaying the foamed plastic layer and ink wherein the portion of the cured coating or the cured layer disposed over the ink is chemically and mechanically
10 embossed,

(e) a chemically and mechanically embossed top coat wear layer comprised of polyurethane.

59. A surface covering which comprises:

(a) a substrate,
15 (b) a plastic layer overlaying the substrate,
(c) an ink containing a photoinitiator printed in a design on said plastic layer,

(d) a cured coating or a cured layer overlaying the plastic layer and the ink wherein the cured coating or the cured layer
20 overlaying the ink is mechanically embossed,

(e) a mechanically embossed top coat wear layer comprised of polyurethane.